

AUSTRIA | MOLTO LUCE GMBH

HEADQUARTERS WELS
Office & Showroom
Europastraße 45
4600 Wels
T: +43 7242 698-0
M: office@moltoluce.com

VIENNA
Office & Showroom
Vorarlberger Allee 28
1230 Vienna
T: +43 1 6160300
M: office.wien@moltoluce.com

GRAZ
Office
Robert-Viertl-Straße 2
8055 Graz
T: +43 316 672525-0
M: office.graz@moltoluce.com

INNSBRUCK
Office
Orbis Office, Resselstraße 33 / Top 5
6020 Innsbruck
T: +43 512 345688
M: office.innsbruck@moltoluce.com

GERMANY | MOLTO LUCE GMBH

MUNICH
Office & Showroom
Walter-Gropius-Straße 23
80807 Munich
T: +49 89 4520565-0
M: office.muenchen@moltoluce.com

COLOGNE
Office & Showroom
Gut Maarhausen, Eiler Straße 3v
51107 Cologne
T: +49 221 222882-0
M: office.koeln@moltoluce.com

HAMBURG
Office & Showroom
Wandsbeker Allee 77
22041 Hamburg
T: +49 40 2847850-1
M: office.hamburg@moltoluce.com

ITALY | MOLTO LUCE srl

BRESCIA
Office
Viale Duca D' Aosta 28
25121 Brescia
T: +39 030 2400679
M: office.brescia@moltoluce.com

SWITZERLAND | MOLTO LUCE AG


LENZBURG
Office
Niederlenzerstraße 25
5600 Lenzburg
T: +41 62 885 70 30
M: office.lenzburg@moltoluce.com

www.moltoluce.com


MAGNETICS



MAGNETICS

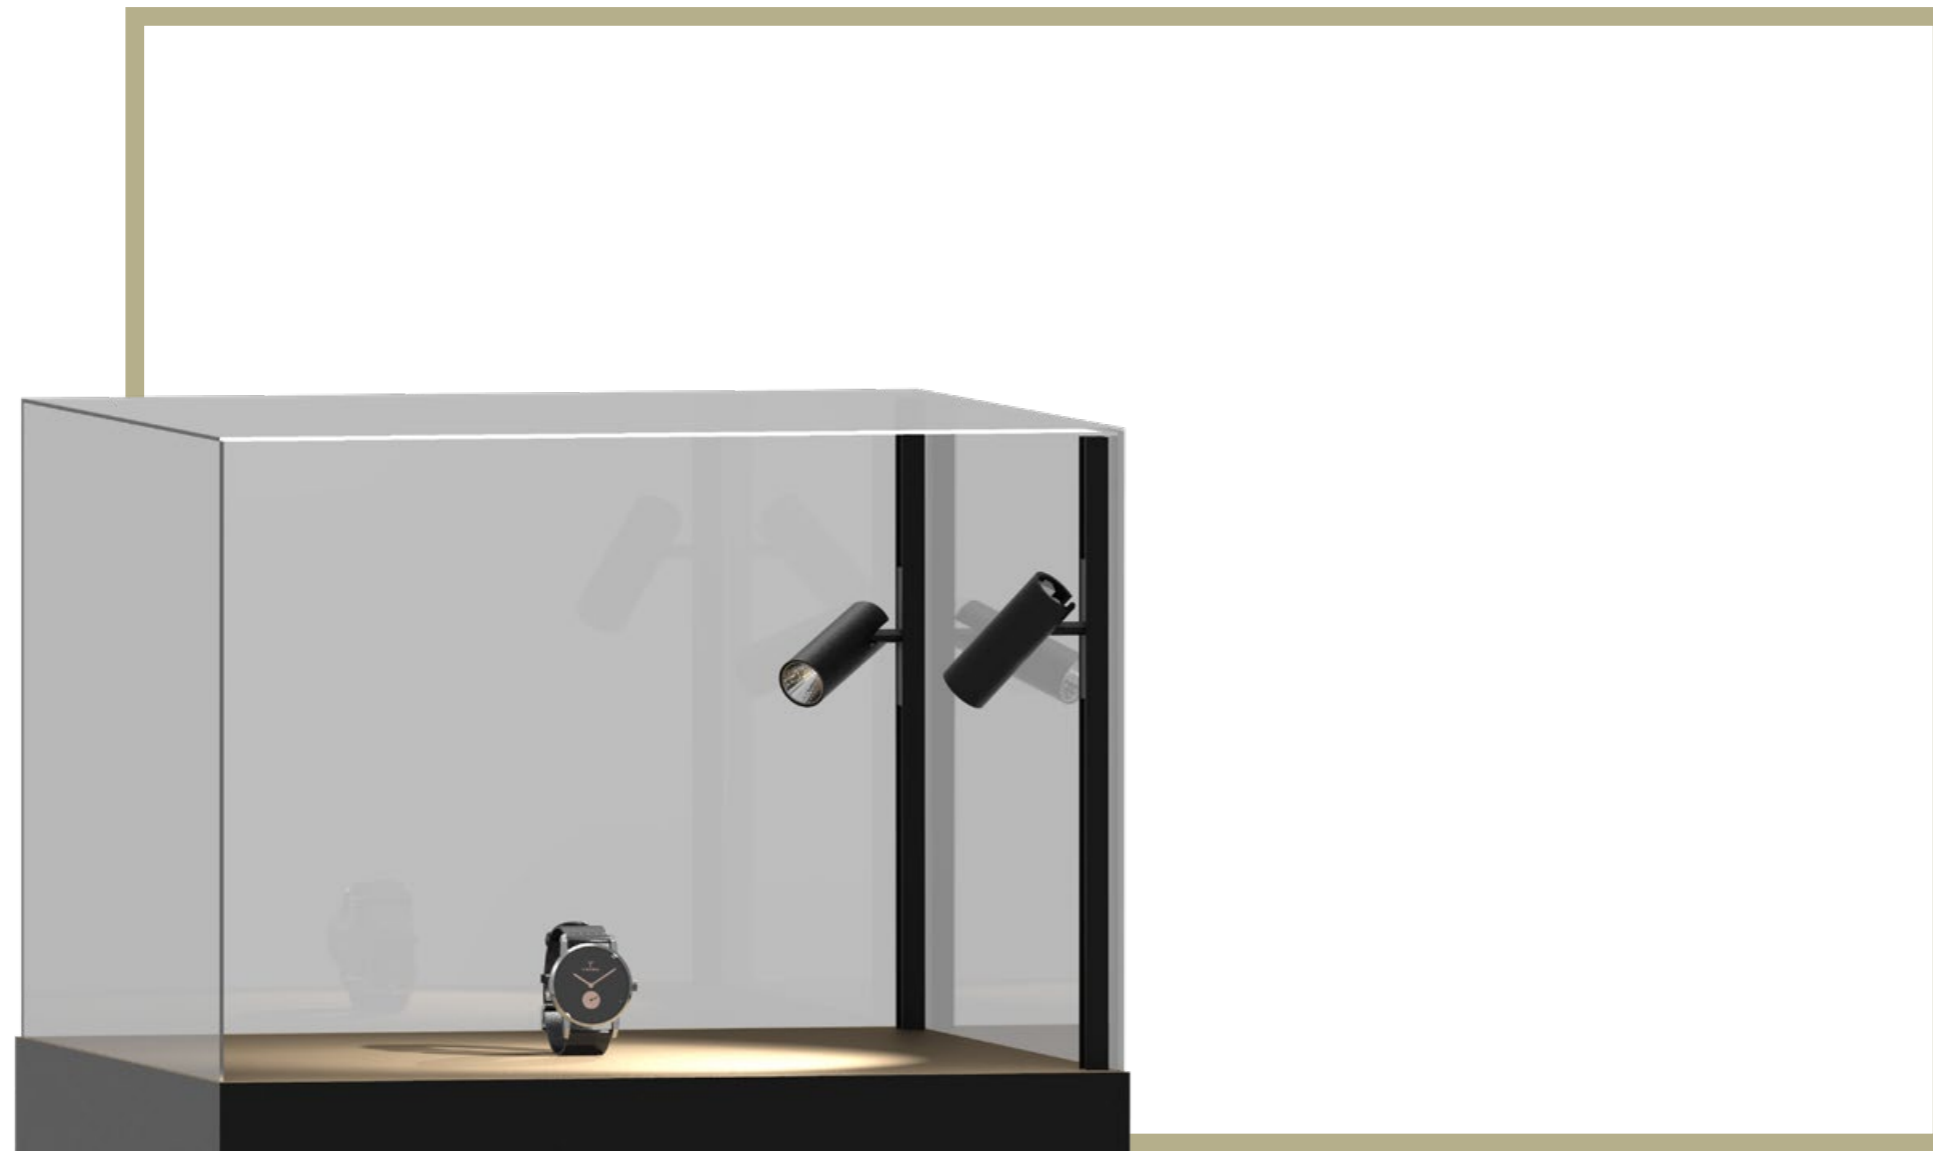

16,5mm



12,6mm



Präsentationsvideo
Presentation video

MAXIMUM FLEXIBILITY WITH MAGNETICS

Das absolut reduzierte 24V-System begeistert mit seiner Größe von nur 16x12mm, welche der einer 1 Cent Münze entspricht. Versetzen, verschieben oder einfach nur den Strahlerkopf verstellen, die einfache Magnetbefestigung ermöglicht ein schnelles Umgestalten aller Komponenten. Die Lichteinsätze in unterschiedlichen Längen und die beiden Strahler in zwei Größen, bieten eine bündig in der Schiene sitzende lineare Grundbeleuchtung mit Akzentuierung. Somit kann mit nur einem Handgriff jedes beliebige Objekt in Szene gesetzt werden. Mit den L-, T-, X- & Flex-Verbindern sowie 90° Decke-Wand Verbindern können effektvolle Systeme entstehen. Die Befestigung egal ob auf Holz, Metall oder Glas erweitert das umfangreiche Einsatzgebiet des dezenten Systems. Die eigens von Molto Luce entwickelte Elektronik ermöglicht eine Leuchten-Effizienz, die bei 24V Systemen ihresgleichen sucht.

The absolutely reduced 24V system impresses with its size of only 16x12mm, which corresponds to the size of a 1 cent coin. Displace, move or simply adjust the spotlight head, the simple magnetic attachment allows for quick redesign of all components. The two light inserts in different lengths and the two spotlights in two sizes provide linear ambient lighting with accent lighting, flush with the rail. This means that any object can be staged with just one movement. Effective systems can be created with the L, T, X & Flex connectors as well as 90° ceiling to wall connectors. The mounting, whether on wood, metal or glass, extends the extensive range of applications of this unobtrusive system. The electronic system especially developed by Molto Luce allows a luminaire efficiency which is unrivalled at 24V systems.

Design: INHOUSE

MAGNETICS



- ❶ Einspeisung Profil / Power feed profile
- ❷ Linearverbinder innenliegend / Linear junction inside
- ❸ Aufbauprofil gerade / Surface profile straight 300 - 2400mm
- ❹ Lichteinsatz opal / Opal light insert 150, 300, 600 & 900mm
- ❺ Lichteinsatz Raster / Grid light insert 150mm
- ❻ 90° Profil / 90° Profile
- ❼ 4W Strahler Linse 20° oder 30° / 4W spot lens 20° or 30°
- ❽ 7W Strahler Reflektor 24° oder 38° / 7W spot reflector 24° or 38°
- ❾ Enddeckel / End piece




PROFILE

PROFIL / PROFILE

Inkl. Platinenverbinder, Endkappen separat ordern / incl. board junction, order end piece separately

708-001010000060	S	L: 300mm	708-001050000060	S	L: 1500mm
708-001020000060	S	L: 600mm	708-001060000060	S	L: 1800mm
708-001030000060	S	L: 900mm	708-001070000060	S	L: 2100mm
708-001040000060	S	L: 1200mm	708-001080000060	S	L: 2400mm

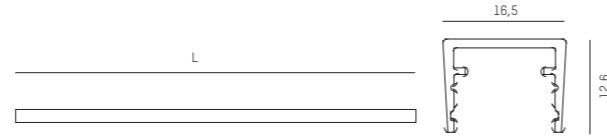

INSERTS


LICHTEINSATZ GERADE / LIGHT INSERT STRAIGHT

24V DC · Binning SDCM 3

SYS 2W / L: 150mm	lm W2	lm W3	lm W4	SYS 4W / L: 300mm	lm W2	lm W3	lm W4
708-0030110WW060	135	135	135	708-0030310WW060	270	270	270

SYS 8W / L: 600mm	lm W2	lm W3	lm W4	SYS 12W / L: 900mm	lm W2	lm W3	lm W4
708-0030410WW060	540	540	540	708-0030510WW060	810	810	810


OPAL DIFFUSER



RASTER LICHTEINSATZ / GRID LIGHT INSERT

24V DC · Binning SDCM 3

SYS 4W / L: 150mm	lm W2	lm W3	lm W4
708-0030120WW060	110	120	130 (UGR>16)
708-0030130WW060	290	300	310



ARTIKELNUMMER ERGÄNZEN / COMPLETE CODE



WW = LICHTFARBE SPOT EINSATZ / LIGHT COLOUR SPOT INSERT

W2 LED 2700K = 23 CRI >90 W3 LED 3000K = 29 CRI >90 W4 LED 4000K = 24 CRI >90

SPOT EINSATZ / SPOT INSERT



24V DC · Binning SDCM 3

SYS 4W LENS	lm W2	lm W3	lm W4
708-0020104WW060	290	310	340
708-0020106WW060	310	330	360



SYS 7W REFLECTOR BASIC

708-0020202WW060	lm W2	lm W3	lm W4
708-0020203WW060	340	340	480
	390	390	440



SYS 7W REFLECTOR DARK

708-0020208WW060	lm W2	lm W3	lm W4
708-0020209WW060	210	210	230
	200	200	230

ARTIKELNUMMER ERGÄNZEN / COMPLETE CODE

WW = LICHTFARBE SPOT EINSATZ / LIGHT COLOUR SPOT INSERT

W2 LED 2700K = 43 PREMIUM CRI >90 W3 LED 3000K = 49 PREMIUM CRI >90 W4 LED 4000K = 24 CRI >90

JUNCTION

90° VERBINDER / 90° JUNCTION

Inkl. 1 Stk. Platinenverbinder / incl. 1 pce. board junction


708-005010000060



90° WAND/DECKEN VERBINDER / 90° WALL/CEILING JUNCTION

Inkl. 1 Stk. Platinenverbinder / incl. 1 pce. board junction


708-005020000060



T VERBINDER / T JUNCTION

Inkl. 2 Stk. Platinenverbinder / incl. 2 pcs. board junction


708-005040000060



X VERBINDER / X JUNCTION

Inkl. 3 Stk. Platinenverbinder / incl. 3 pcs. board junction

708-005050000060

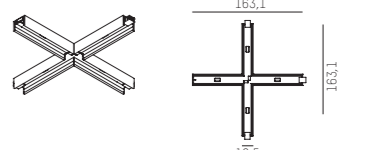

PLATINENVERBINDER SET / BOARD JUNCTION SET

5 Stk. / 5 pcs (Ersatzteil / spare part)

708-000010000060



POWER FEED

EINSPEISUNG ENDE + MITTE PROFIL AUFBAU / POWER FEED END + CENTER PROFILE SURFACE

Inkl. Enddeckel, Konverter separat ordern / incl. end piece order converter separately

708-004010000060




EINSPEISUNG ENDE + MITTE PROFIL EINBAU / POWER FEED END + CENTER PROFILE RECESSED

Inkl. Enddeckel, Konverter separat ordern / incl. end piece order converter separately

708-004050000060

68 mm, ET 100mm



LED CONVERTER MAGNETICS

24-127824	W	schaltbar/switchable	24V / 120W	L 300 x B 40 x H 30mm
248-001922	W	DALI dimm.	24V / 100W	L 295 x B 43 x H 30mm
248-002417	W	CASAMBI dimm.	24V / 100W	L 295 x B 43 x H 30mm
24-127824 + 552-100324	W	LOXONE dimm.	24V / 120W	L 300 x B 40 x H 30mm (Converter) + L 136 x B 36 x H 23mm (dimmer)
24-127824 + 701-1004	W	SMART BLUETOOTH dimm.	24V / 120W	L 300 x B 40 x H 30mm (Converter) + L 115 x B 34 x H 19mm (dimmer)

EINSPEISUNG BADACHIN / POWER FEED CEILING BASE


Inkl. Konverter / incl. converter

708-004030000060

S schaltbar/switchable 1 x 100W



708-004040000060	S	schaltbar/switchable	2 x 100W	
708-00406000006d	S	DALI dimm.	1 x 100W	
708-00407000006d	S	DALI dimm.	1 x 100W	2 Kanal / 2 channel
708-00407000006b	S	BBL dimm.	1 x 100W	2 Kanal / 2 channel
708-00408000006d	S	DALI dimm.	1 x 100W	4 Kanal / 4 channel
708-00408000006r	S	LOXONE dimm.	1 x 100W	4 Kanal / 4 channel (max. 50W pro Kanal / per channel)
708-00408000006c	S	CASAMBI dimm.	1 x 100W	4 Kanal / 4 channel



ENDDECKEL / END PIECE


1 Stk. / 1 pce.

708-006010000060



EINBAU MONTAGESSET / RECESSED MOUNTING SET

708-0000200

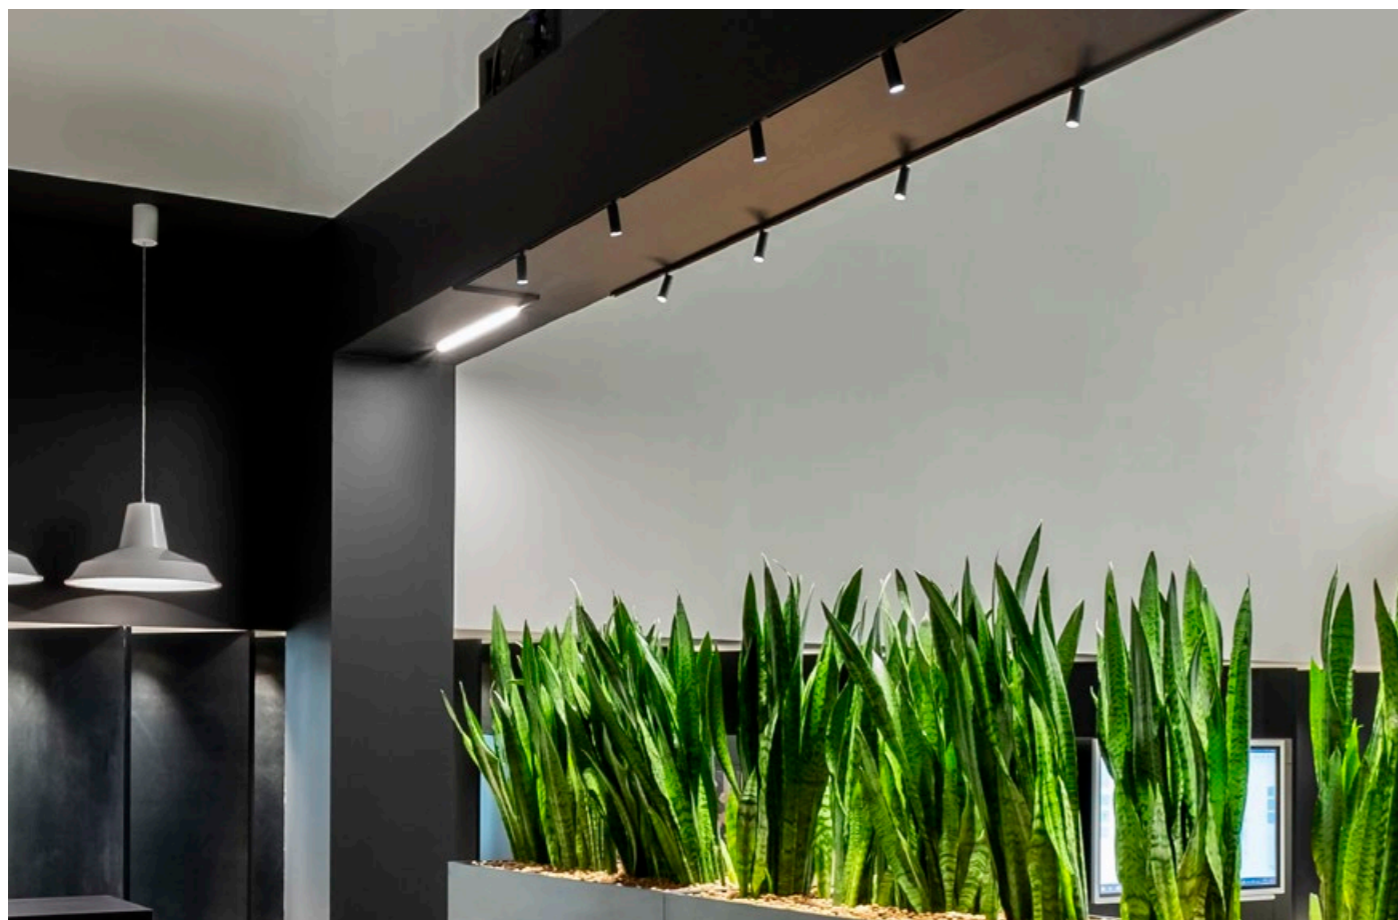

MAGNETICS

Design: INHOUSE