


## AESTA

100-50009g00

AESTA ACCU T TABLE LUMINAIRE green, beam 100°, light output direct, 4400mA battery, dimmability: Touch Dim, cable charging cable 1500mm, IP65  
Max. 9h autonomous operation



## DRAWING

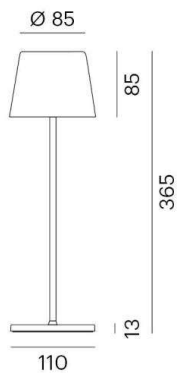

## TECHNICAL DETAILS

System perform. [W]	2
Bulb type	LED
Luminous flux [lm]	150
Colour temp. [K]	3000K
CRI	>80
Converter	4400mA battery
Light output	direct
Beam angle [°]	100°
Voltage [V]	3,7 VDC
Height [mm]	365
Diameter [mm]	110
IP protection class	IP65
Voltage class	protection cl. III
Shock resistance	IK06
Net weight [kg]	0,88
Colour lamp	green
Electric wire	charging cable 1500mm
EAN-Number	9010506653670
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	B

## LIGHT DISTRIBUTION CURVE



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.