


**THEMIS**

**121-2207111000**

THEMIS SURFACE MOUNTED DOWNLIGHT made of aluminium, white, polycarbonate cover beam 38°, light output direct, UGR <19, tilting 20°, with converter, dimmability: not dimmable, IP20




**DRAWING**

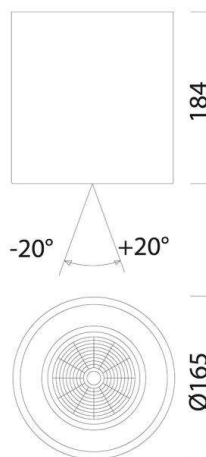

**TECHNICAL DETAILS**

System perform. [W]	33
Bulb type	LED
Luminous flux [lm]	2515
Colour temp. [K]	3000K
CRI	>90
UGR	<19
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	38°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	184
Diameter [mm]	165
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK07
Net weight [kg]	1,18
Color lamp	white
EAN-Number	8016535101732
Lifetime [h]	50 000

**LIGHT DISTRIBUTION CURVE**

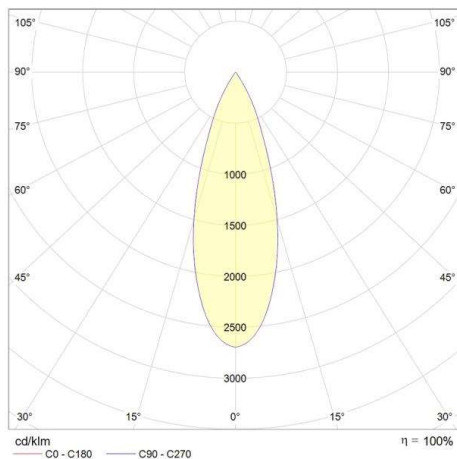

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.