


**SPEAKER 2**

**121-2208441500**


SPEAKER LED RECESSED DOWNLIGHT made of aluminium, white, satined PMMA opal diffuser beam 100°, light output direct, with converter, dimmable not dimmable, IP20



**DRAWING**

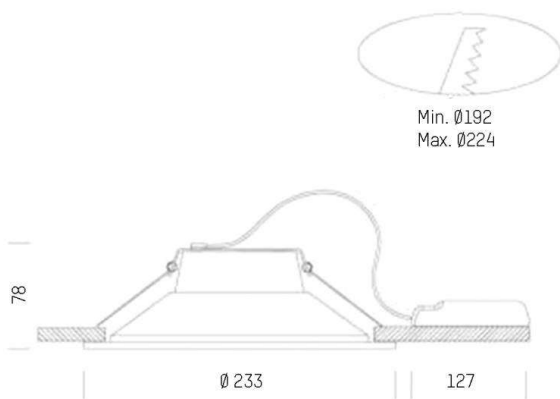

**LIGHT DISTRIBUTION CURVE**

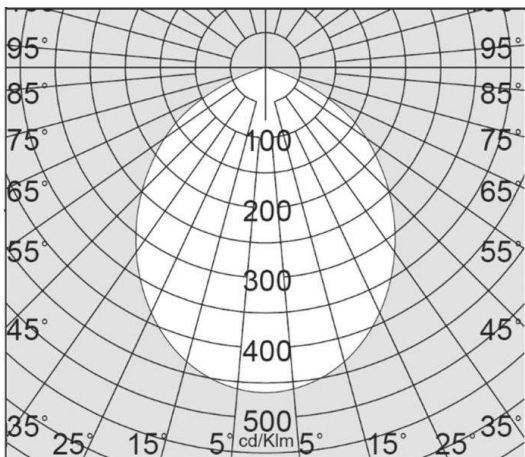

**TECHNICAL DETAILS**

System perform. [W]	25
Bulb type	LED
Luminous flux [lm]	2013
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Beam angle [°]	100°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	82
Diameter [mm]	230
Ceiling cutout [mm]	192-224
Ceiling thickness [mm]	1-40
Recess depth [mm]	102
IP protection class	IP20
Voltage class	protection cl. II
Shock resistance	IK04
Net weight [kg]	0,30
Color lamp	white
EAN-Number	8016535082338
Lifetime [h]	30 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.