


SUSA

125-34050100

SUSA ME POLE LUMINAIRE made of aluminium, grey, PMMA cover beam asymmetric, light output direct, with converter, dimmability: not dimmable, IP66




DRAWING

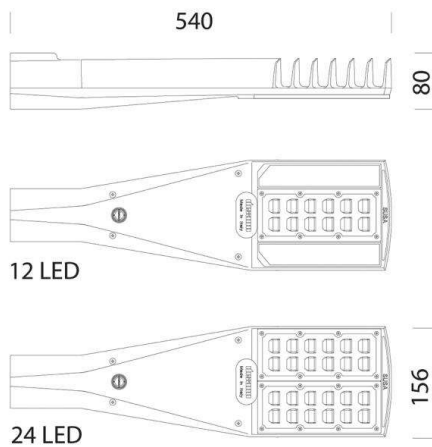

TECHNICAL DETAILS

System perform. [W]	81
Bulb type	LED
Luminous flux [lm]	9979
Colour temp. [K]	4000K
CRI	>80
Optics	PMMA diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	540
Width [mm]	156
Height [mm]	80
IP protection class	IP66
Voltage class	protection cl. II
Shock resistance	IK07
Net weight [kg]	2,76
Colour lamp	grey
EAN-Number	8012952148824
Lifetime [h]	50 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

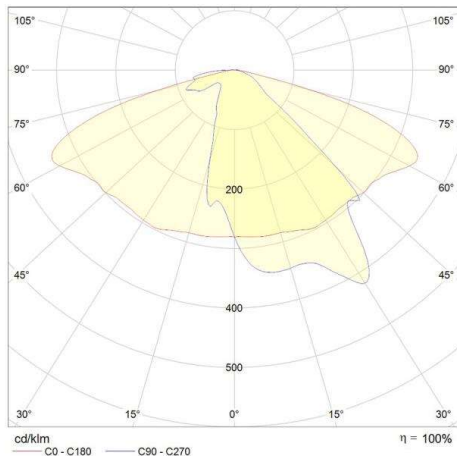

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.