


RODIO

125-41478700

RODIO SYM LED FLOODLIGHTS made of aluminium, grey, transparent glass beam symmetric, light output direct, tilting 90°, with converter, dimmability: not dimmable, IP66




DRAWING

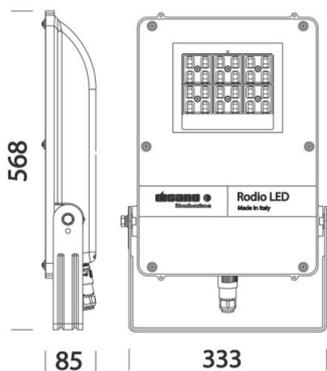

TECHNICAL DETAILS

| | |
|------------------------|-------------------|
| System perform. [W] | 157 |
| Bulb type | LED |
| Luminous flux [lm] | 23254 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| Optics | transparent glass |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | symmetrisch |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 333 |
| Width [mm] | 80 |
| Height [mm] | 568 |
| IP protection class | IP66 |
| Voltage class | protection cl. II |
| Shock resistance | IK08 |
| Net weight [kg] | 6,08 |
| Colour lamp | grey |
| EAN-Number | 8012952135817 |
| Lifetime [h] | 80 000 |
| Ambient temperature | -20° bis +40° |
| Energy efficiency cl. | F |
| No. of luminaires B16A | 8 |

LIGHT DISTRIBUTION CURVE

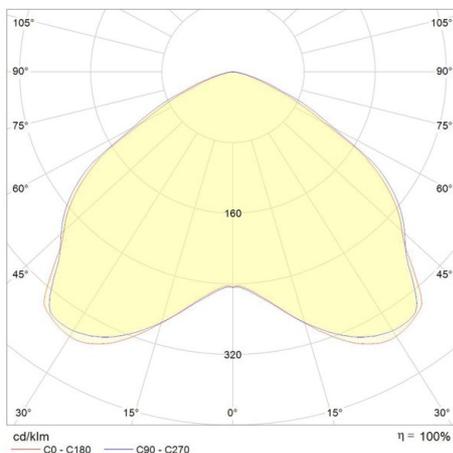

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.