


KUBIK

140-a070010110401

KUBIK WALL / CEILING LUMINAIRE made of metal, shade made of hand-blown glass satined white, light output direct, with converter, dimmability: not dimmable, IP40

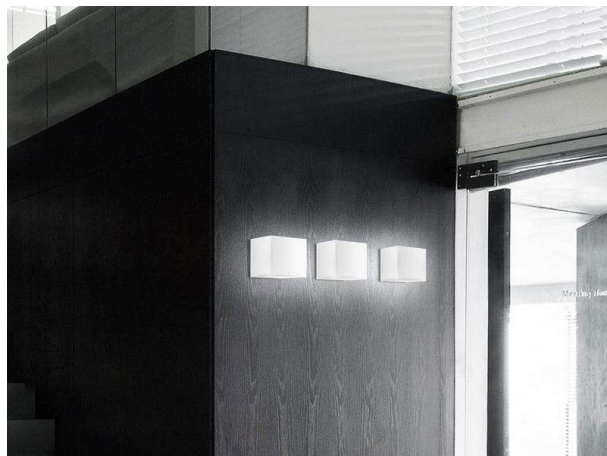


DRAWING

TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	667
Colour temp. [K]	3000K
CRI	>90
Optics	hand-blown glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	metal
Length [mm]	110
Width [mm]	110
Height [mm]	110
IP protection class	IP40
Voltage class	protection cl. I
Net weight [kg]	0,66
Colour of glass/shade	satined white
EAN-Number	8059016462182
Lifetime [h]	50 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

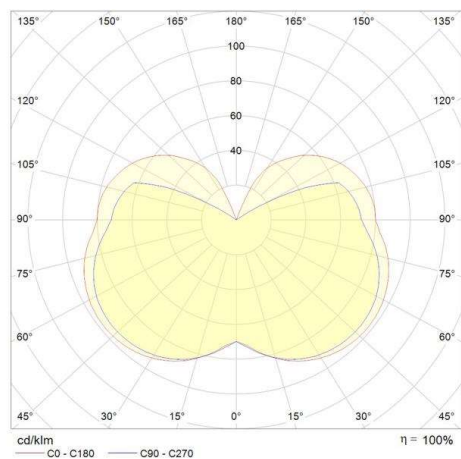

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.