


INVISIBLI XGR

140-xgr1024

INVISIBLI XGR WALL LED RECESSED SPOTLIGHT made of gypsum, gypsum, white, light output direct, without converter, max. 350mA, IP20




DRAWING

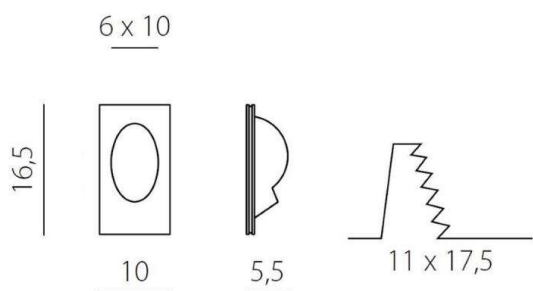

TECHNICAL DETAILS

System perform. [W]	1
Bulb type	LED
Luminous flux [lm]	115
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>80
Converter	without converter
Light output	direct
Material	gypsum
Length [mm]	165
Width [mm]	100
Height [mm]	165
Ceiling cutout [mm]	110x175
Recess depth [mm]	55
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,49
Color lamp	gypsum
Glass color	white
EAN-Number	8033229165108
Lifetime [h]	50 000

LIGHT DISTRIBUTION CURVE

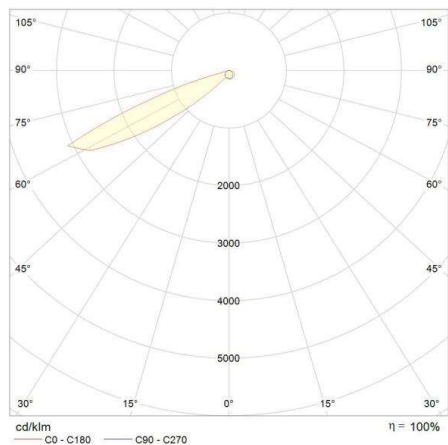

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.