


**VARIDO 2**

**149-002030114040**

VARIDO 2 ASYM TRACK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of steel sheet, grey matt, similar to RAL 9004, decor grey, Lens optics with vacuum deposited synthetic reflector beam asymmetric, light output direct, swiveling 350°, with converter, max. 1050mA, dimmability: not dimmable, adapter/ceiling base grey, IP20




**DRAWING**

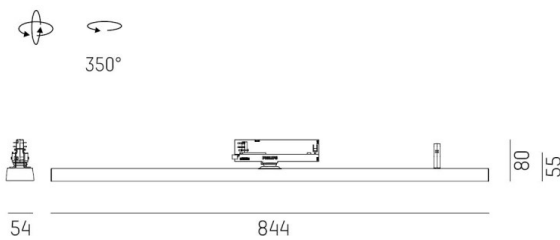

**TECHNICAL DETAILS**

System perform. [W]	31
Bulb type	LED
Luminous flux [lm]	3150
Current sec. [mA]	1050
Colour temp. [K]	4000K
CRI	>80
Optics	Lens optics with vacuum deposited synthetic reflector
Designer	INHOUSE
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	steel sheet
Length [mm]	844
Width [mm]	54
Height [mm]	24
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	1,53
Colour lamp	grey matt
RAL	9004
Colour adapter/ceiling base	grey
Colour decor	grey
EAN-Number	9010506112351
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	C
No. of luminaires B16A	50

**LIGHT DISTRIBUTION CURVE**

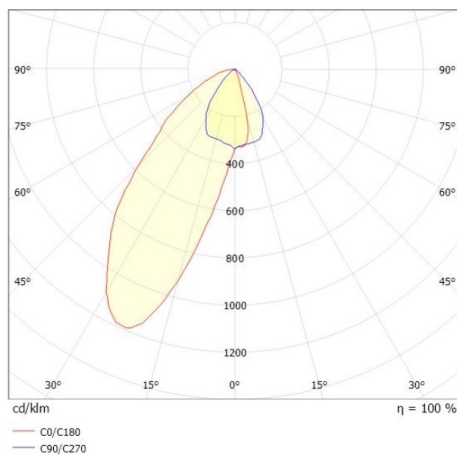

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.