


TUNE

157-0220070116442

TUNE M GLAS HIGH-BAY REFLECTOR LUMINAIRE made of aluminium, silver, similar to RAL 9006, high quality plastic lens beam 75°, accessoire: glass, light output direct, UGR <25, with converter, max. 4150mA, dimmability: DALI 2, IP66



DRAWING

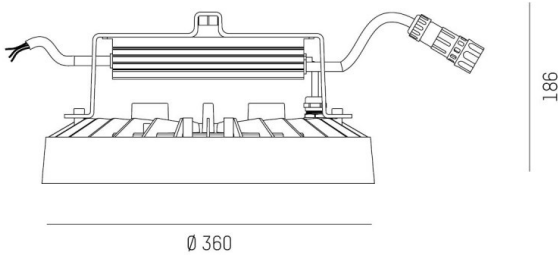


186

TECHNICAL DETAILS

| | |
|------------------------|---------------------------|
| System perform. [W] | 205 |
| Bulb type | LED |
| Luminous flux [lm] | 30030 |
| Current sec. [mA] | 4150 |
| Colour temp. [K] | 6500K |
| CRI | >80 |
| UGR | <25 |
| Optics | high quality plastic lens |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | 75° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 362,1 |
| Height [mm] | 186 |
| Diameter [mm] | 360 |
| IP protection class | IP66 |
| Voltage class | protection cl. I |
| Shock resistance | IK08 |
| Net weight [kg] | 6,10 |
| Colour lamp | silver |
| RAL | 9006 |
| EAN-Number | 9010506737868 |
| Lifetime [h] | 70 000 L80 B10 |
| Ambient temperature | -30° bis +45° |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 7 |

LIGHT DISTRIBUTION CURVE

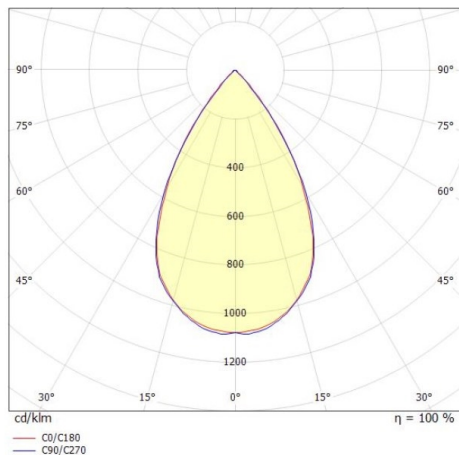

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.