


30NE

175-0462046231440

30NE HIGH-LOW DIFFUSER LUMINAIRE made of glass fibre reinforced polyester, grey, similar to RAL 7035, polycarbonate cover light output direct, UGR <28, with converter, dimmability: not dimmable, IP66 suitable for temperature range -30°C to +55°C




DRAWING

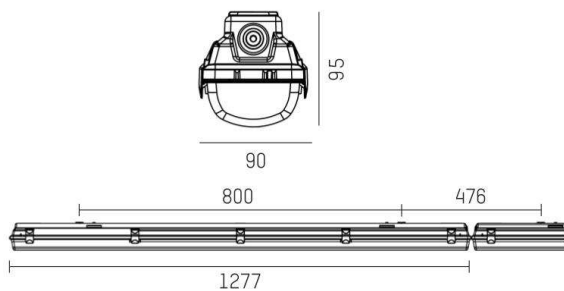

TECHNICAL DETAILS

System perform. [W]	32
Bulb type	LED
Luminous flux [lm]	4696
Colour temp. [K]	4000K
CRI	>80
UGR	<28
Optics	polycarbonate cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	glass fibre reinforced polyester
Length [mm]	1277
Width [mm]	90
Height [mm]	95
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK08
Net weight [kg]	1,75
Colour lamp	grey
RAL	7035
EAN-Number	9010506635782
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	D
No. of luminaires B16A	18
IFS suitable	Yes

LIGHT DISTRIBUTION CURVE

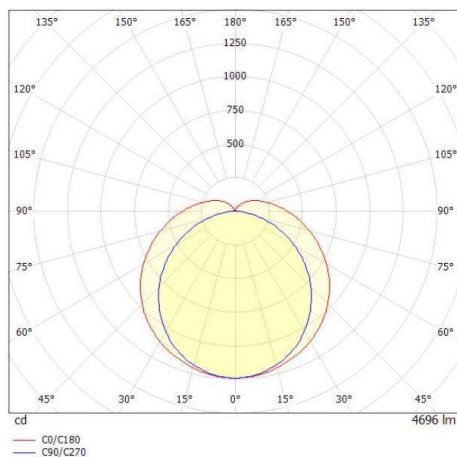

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.