


30NE

175-0565466131440

30NE EXTREME DIFFUSER LUMINAIRE made of glass fibre reinforced polyester, grey, similar to RAL 7035, PMMA cover light output direct, UGR <28, with converter, dimmability: not dimmable, through wiring 5x2,5mm<sup>2</sup>, IP66 suitable for applications with high chemical exposure




DRAWING

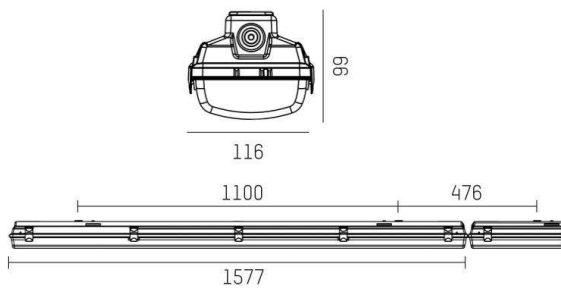

TECHNICAL DETAILS

System perform. [W]	43
Bulb type	LED
Luminous flux [lm]	6600
Colour temp. [K]	4000K
CRI	>80
UGR	<28
Optics	PMMA diffuser
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	5x2,5mm <sup>2</sup>
Material	glass fibre reinforced polyester
Length [mm]	1577
Width [mm]	116
Height [mm]	99
IP protection class	IP66
Voltage class	protection cl. I
Shock resistance	IK03
Net weight [kg]	2,92
Colour lamp	grey
RAL	7035
EAN-Number	9010506635836
Lifetime [h]	50 000 L80 B10
Energy efficiency cl.	D
No. of luminaires B16A	24
IFS suitable	Yes

LIGHT DISTRIBUTION CURVE

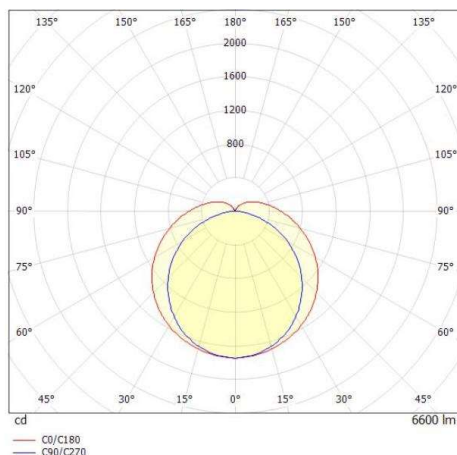

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.