


LORA

176-1020300029550

LORA 3 PD SUSPENSION made of steel, white, similar to RAL 9003, white white, beam 42°, light output direct, with converter, max. 500mA, dimmability: not dimmable, cable white, adapter/ceiling base white, pendant length 1500mm, IP20




DRAWING

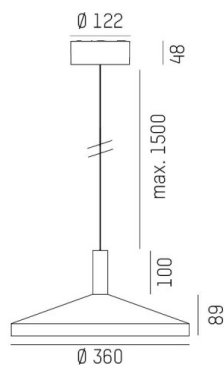

TECHNICAL DETAILS

| | |
|-----------------------------|------------------|
| System perform. [W] | 10 |
| Bulb type | LED |
| Luminous flux [lm] | 700 |
| Current sec. [mA] | 500 |
| Colour temp. [K] | 3000K |
| CRI | >90 |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Beam angle [°] | 42° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | steel |
| Length [mm] | 360 |
| Height [mm] | 89 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 360 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 1,29 |
| Colour lamp | white |
| RAL | 9003 |
| Colour of glass/shade | white white |
| Colour adapter/ceiling base | white |
| Electric wire | white |
| EAN-Number | 9010506764789 |
| Lifetime [h] | L80 B10 20 000 |
| Energy efficiency cl. | F |

LIGHT DISTRIBUTION CURVE

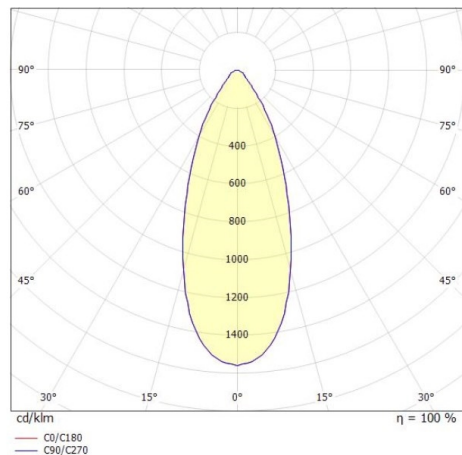

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.