


LORA

176-102050002365d


LORA 5 PD SUSPENSION made of steel, black, similar to RAL 7016, white white, beam 42°, light output direct, with converter, max. 500mA, dimmability: DALI, cable black, adapter/ceiling base black, pendant length 1500mm, IP20



DRAWING

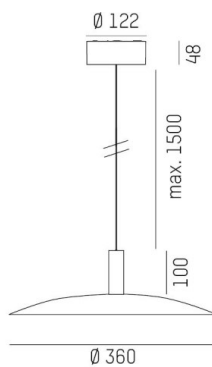

LIGHT DISTRIBUTION CURVE

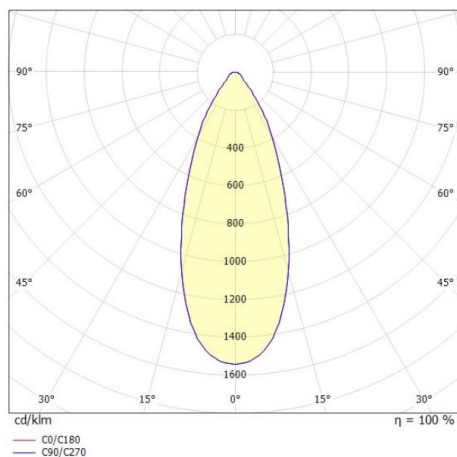

TECHNICAL DETAILS

| | |
|-----------------------------|------------------|
| System perform. [W] | 10 |
| Bulb type | LED |
| Luminous flux [lm] | 690 |
| Current sec. [mA] | 500 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Converter | with converter |
| Light output | direct |
| Beam angle [°] | 42° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | steel |
| Length [mm] | 330 |
| Height [mm] | 100 |
| Pendant length [mm] | 1500 |
| Diameter [mm] | 360 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 1,53 |
| Colour lamp | black |
| RAL | 7016 |
| Colour of glass/shade | white white |
| Colour adapter/ceiling base | black |
| Electric wire | black |
| EAN-Number | 9010506764505 |
| Lifetime [h] | L80 B10 20 000 |
| Energy efficiency cl. | F |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.