


## LORA

176-102050002955d

LORA 5 PD SUSPENSION made of aluminium, white, similar to RAL 9003, white white, beam 42°, light output direct, with converter, max. 500mA, dimmability: DALI, cable white, adapter/ceiling base white, pendant length 1500mm, IP20



## DRAWING

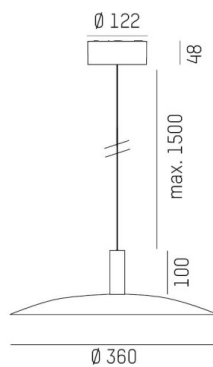


## TECHNICAL DETAILS

|                     |                  |
|---------------------|------------------|
| System perform. [W] | 10               |
| Bulb type           | LED              |
| Luminous flux [lm]  | 690              |
| Current sec. [mA]   | 500              |
| Colour temp. [K]    | 3000K            |
| CRI                 | >90              |
| Converter           | with converter   |
| Light output        | direct           |
| Beam angle [°]      | 42°              |
| Voltage [V]         | 220-240V 50/60Hz |
| Material            | aluminium        |

|                     |                  |
|---------------------|------------------|
| Length [mm]         | 330              |
| Height [mm]         | 100              |
| Pendant length [mm] | 1500             |
| Diameter [mm]       | 360              |
| IP protection class | IP20             |
| Voltage class       | protection cl. I |
| Net weight [kg]     | 1,53             |

|                             |                |
|-----------------------------|----------------|
| Colour lamp                 | white          |
| RAL                         | 9003           |
| Colour of glass/shade       | white white    |
| Colour adapter/ceiling base | white          |
| Electric wire               | white          |
| EAN-Number                  | 9010506764468  |
| Lifetime [h]                | L80 B10 20 000 |
| Energy efficiency cl.       | F              |

## LIGHT DISTRIBUTION CURVE

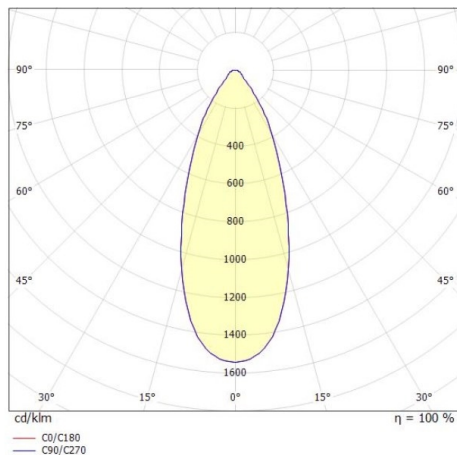

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.