



QUASAR

187-303366

QUASAR 10 1NB 1WB LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey metallic matt, transparent glass light output direct / indirect, with converter, dimmability: not dimmable, IP44

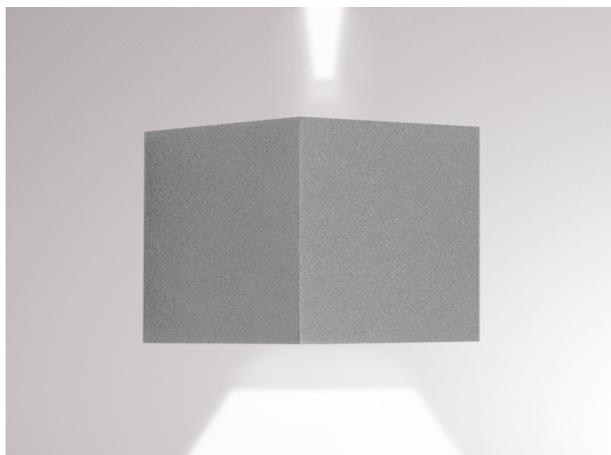


DRAWING

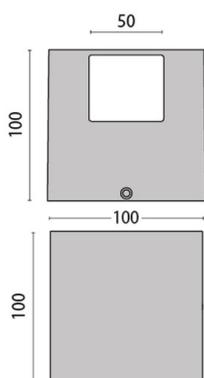

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	113
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	100
Width [mm]	100
Height [mm]	100
Troat [mm]	100
IP protection class	IP44
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	1,01
Colour lamp	grey metallic matt
EAN-Number	8018367612417
Lifetime [h]	50 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

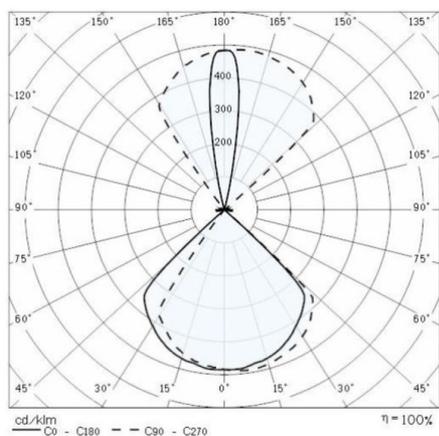

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.