


**PACK R DETEK**

**187-303605**


PACK R DETEK LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, white, satined glass light output indirect, with converter, dimmable not dimmable, with motion detector, IP55



**DRAWING**

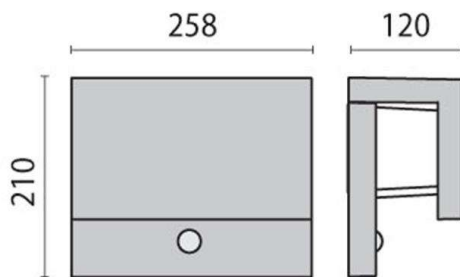

**LIGHT DISTRIBUTION CURVE**

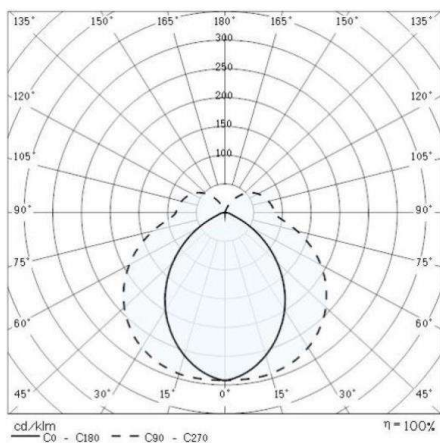

**TECHNICAL DETAILS**

System perform. [W]	15
Bulb type	LED
Luminous flux [lm]	344
Colour temp. [K]	3000K
CRI	>80
Optics	satined glass
Converter	with converter
Dimming	nicht dimmbar
Motion detector	with motion detector
Light output	indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	210
Width [mm]	258
Height [mm]	120
Troat [mm]	120
IP protection class	IP55
Voltage class	protection cl. I
Shock resistance	IK05
Net weight [kg]	16,06

Color lamp	white
EAN-Number	8018367616613
Lifetime [h]	40 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.