


**MIMIK 20 FLAT M**

**187-303746**

MIMIK 20 FLAT M LED SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, microprismatic PMMA cover for perfect anti-glare light output direct, with converter, dimmability: not dimmable, IP65




**DRAWING**

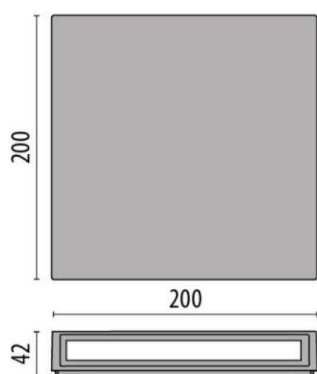

**TECHNICAL DETAILS**

System perform. [W]	14
Bulb type	LED
Luminous flux [lm]	960
Colour temp. [K]	3000K
CRI	>80
Optics	microprismatic cover
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	200
Width [mm]	200
Height [mm]	42
Troat [mm]	42
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	1,42
Colour lamp	grey
EAN-Number	8018367619041
Lifetime [h]	60 000
Energy efficiency cl.	D

**LIGHT DISTRIBUTION CURVE**

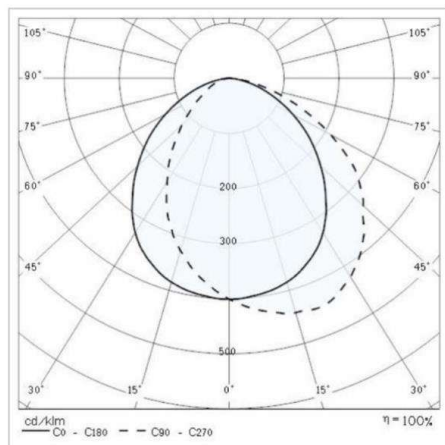

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.