
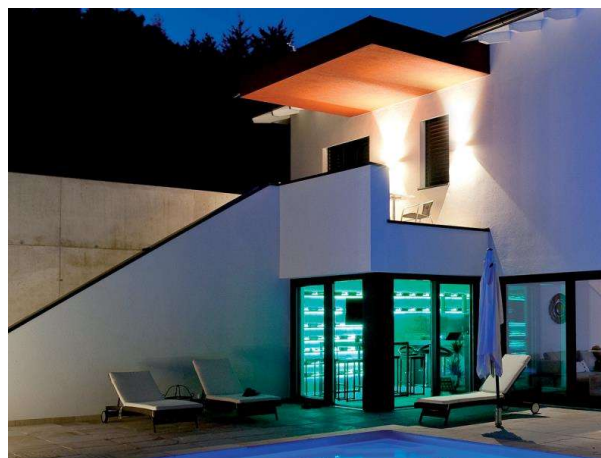



QUASAR 60 M

187-3100818

QUASAR 60 M SURFACE MOUNTED WALL LUMINAIRE made of aluminium, grey, satined glass light output direct, with converter, dimmable not dimmable, IP65

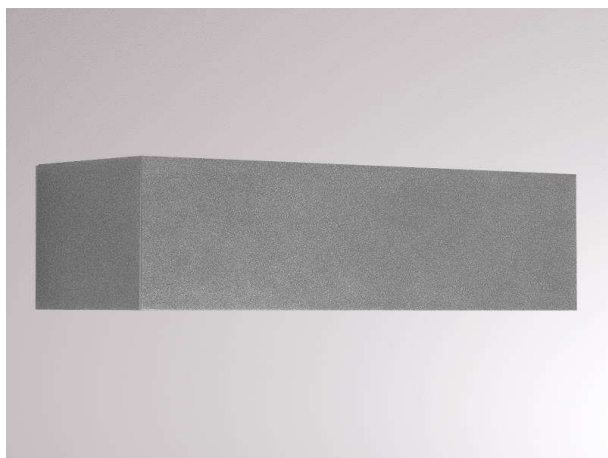

DRAWING

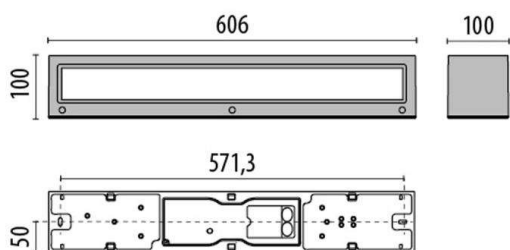


TECHNICAL DETAILS

System perform. [W]	19
Bulb type	LED
Luminous flux [lm]	1631
Colour temp. [K]	3000K
CRI	>80
Optics	satined glass
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	606
Width [mm]	100
Height [mm]	100
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	4,11

LIGHT DISTRIBUTION CURVE

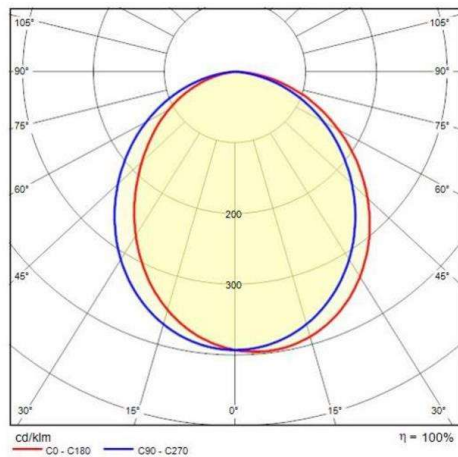

Color lamp	grey
EAN-Number	8018367676402
Lifetime [h]	>100 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.