
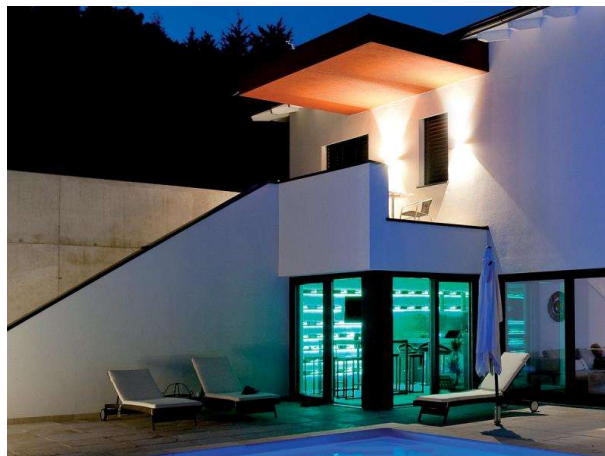



**QUASAR 60 M**

**187-3100819**

QUASAR 60 M SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, satined glass light output direct, with converter, dimmable not dimmable, IP65

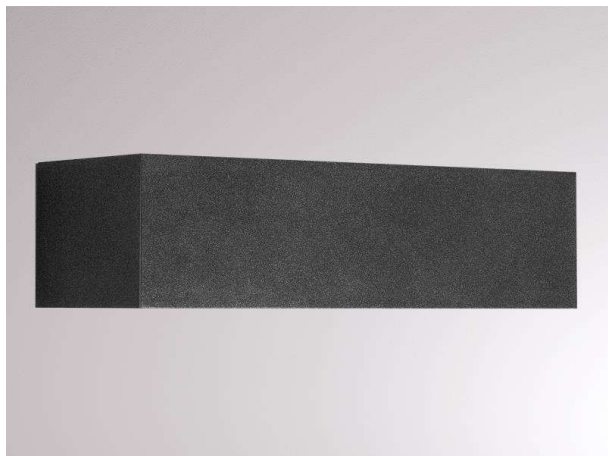


**DRAWING**

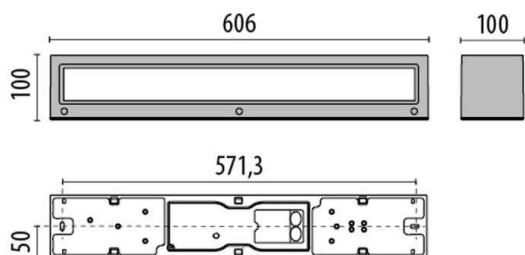

**TECHNICAL DETAILS**

|                     |                  |
|---------------------|------------------|
| System perform. [W] | 19               |
| Bulb type           | LED              |
| Luminous flux [lm]  | 1631             |
| Colour temp. [K]    | 3000K            |
| CRI                 | >80              |
| Optics              | satined glass    |
| Converter           | with converter   |
| Dimming             | not dimmable     |
| Light output        | direct           |
| Voltage [V]         | 220-240V 50/60Hz |
| Material            | aluminium        |
| Length [mm]         | 606              |
| Width [mm]          | 100              |
| Height [mm]         | 100              |
| IP protection class | IP65             |
| Voltage class       | protection cl. I |
| Shock resistance    | IK06             |
| Net weight [kg]     | 4,11             |
| Color lamp          | anthrazite       |
| EAN-Number          | 80183676396      |
| Lifetime [h]        | >100 000         |

**LIGHT DISTRIBUTION CURVE**

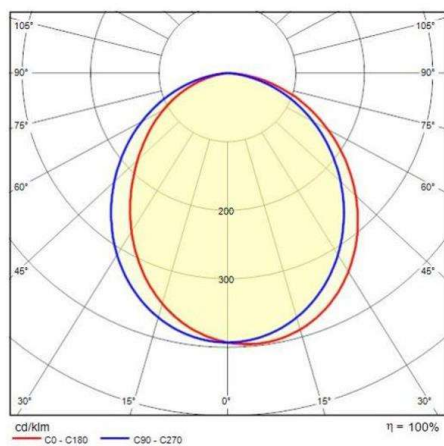

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.