


ORION

187-3105442

ORION V SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, transparent glass beam symmetric, light output direct / indirect, with converter, dimmability: not dimmable, IP65




DRAWING

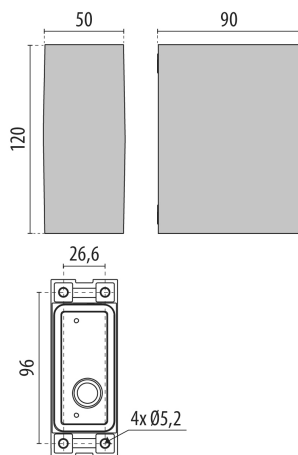

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	800
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct / indirect
Beam angle [°]	symmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	120
Width [mm]	50
Height [mm]	90
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	0,75
Colour lamp	anthrazite
EAN-Number	8018367692358
Lifetime [h]	35 000 L70 B10
Energy efficiency cl.	G
No. of luminaires B16A	66

LIGHT DISTRIBUTION CURVE

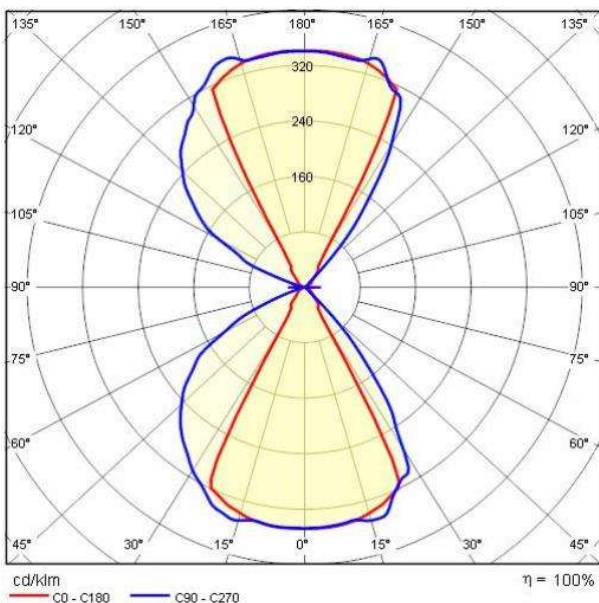

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.