


ORION

187-3105446

ORION H SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, transparent glass beam asymmetric, light output direct, without converter, dimmability: not dimmable, IP65




DRAWING

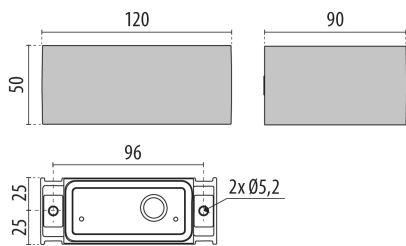

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	AC LED
Luminous flux [lm]	259
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	without converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	120
Width [mm]	90
Height [mm]	50
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	0,62
Colour lamp	anthrazite
EAN-Number	8018367692372
Lifetime [h]	35 000 L70 B10
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

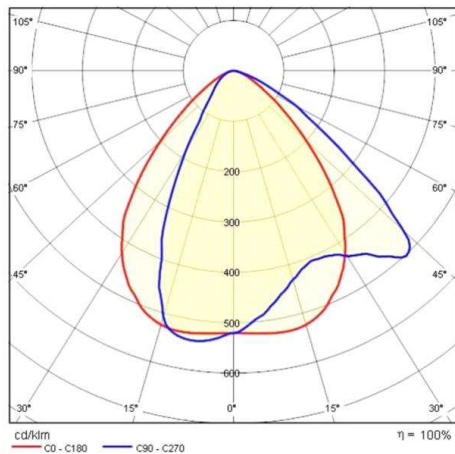

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.