


GA-016 KCLICK

200-18qk0s1o1879

GA-016 KCLICK TRACK SPOTLIGHT WITH 3 PH ADAPTER made of aluminium, black, similar to RAL 9005, transparent glass beam 32°, light output direct, swiveling 350°, tilting 90°, with converter, max. 700mA, dimmability: not dimmable, adapter/ceiling base black, IP20




DRAWING

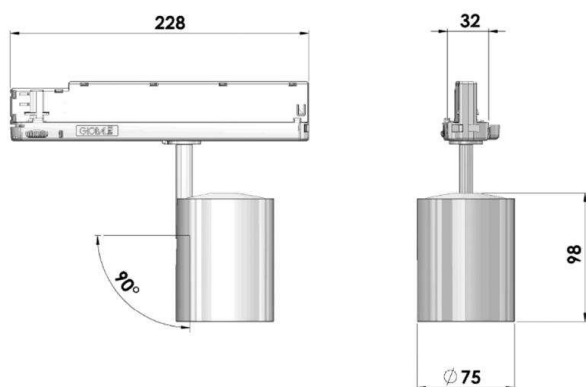

TECHNICAL DETAILS

System perform. [W]	27
Bulb type	LED
Luminous flux [lm]	3450
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	32°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	228
Width [mm]	32
Height [mm]	98
Diameter [mm]	75
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,65
Color lamp	black
RAL	9005
Color adapter/ceiling base	black
EAN-Number	6413631057246
Lifetime [h]	50 000

LIGHT DISTRIBUTION CURVE

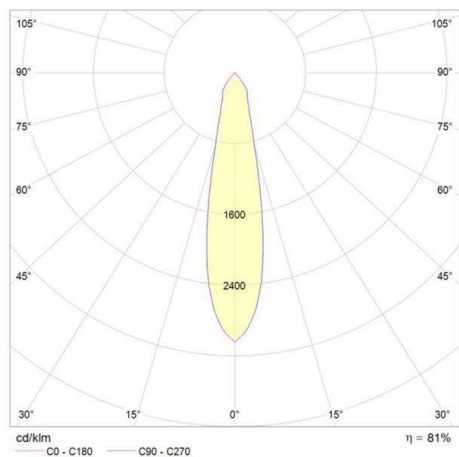

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.