


LORA 2

222-s00345

LORA 2 PD SUSPENSION brass,lens beam 40°, light output direct, UGR <28, with converter, max. 500mA, dimmability: phase section, adapter/ceiling base black, pendant length 3000mm, IP20



DRAWING

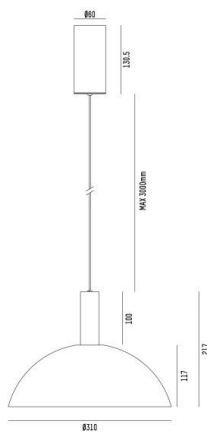


TECHNICAL DETAILS

System perform. [W]	9,5
Bulb type	LED
Luminous flux [lm]	730/800
Current sec. [mA]	500
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<28
Optics	lens
Converter	with converter
Dimming	phase section
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50Hz

Height [mm]	67,3
Pendant length [mm]	3000
Diameter [mm]	240
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,00

Colour lamp	brass
Colour adapter/ceiling base	black
EAN-Number	9010979427112
Lifetime [h]	L80 B10 50 000
Ambient temperature	0° bis +35°
Energy efficiency cl.	E
No. of luminaires B16A	200

LIGHT DISTRIBUTION CURVE

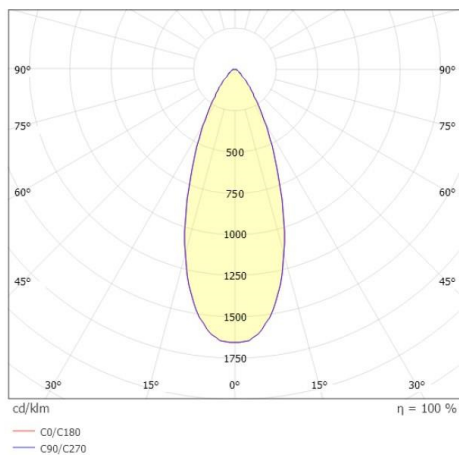

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.