


KONVERTER KONST. STROM

24-127480n



DRAWING

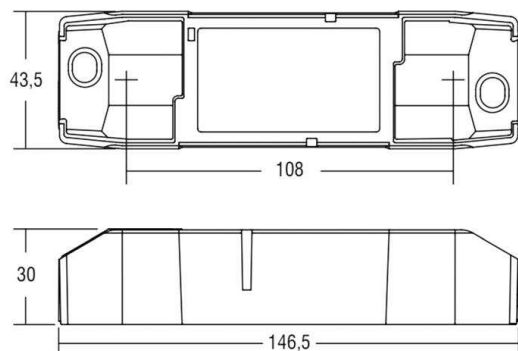

TECHNICAL DETAILS

Converter	with converter
Dimming	not dimmable
Voltage [V]	220-240V 50/60Hz
Material	synthetic
Length [mm]	146,5
Width [mm]	42,5
Height [mm]	30
IP protection class	IP20
Voltage class	protection cl. II
Net weight [kg]	0,12
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

DIP-SWITCH Einstellungen: 24-127480		
P out W	V out DC	I out DC
12W	20 ... 50	250mA Konstantstrom
15W	15 ... 50	300mA Konstantstrom
17W	15 ... 50	350mA Konstantstrom
20W	15 ... 50	400mA Konstantstrom
22W	15 ... 50	450mA Konstantstrom
25W	10 ... 50	500mA Konstantstrom
27W	10 ... 50	550mA Konstantstrom
30W	10 ... 50	600mA Konstantstrom
32W	10 ... 49	650mA Konstantstrom
34W	10 ... 48	700mA Konstantstrom



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.