



ELIX

276-0010990333056

ELIX R RECESSED SPOTLIGHT made of aluminium, white black matt, similar to RAL 9003/9005, beam 33°, light output direct, swiveling 355°, tilting 45°, without converter, max. 500mA, IP20

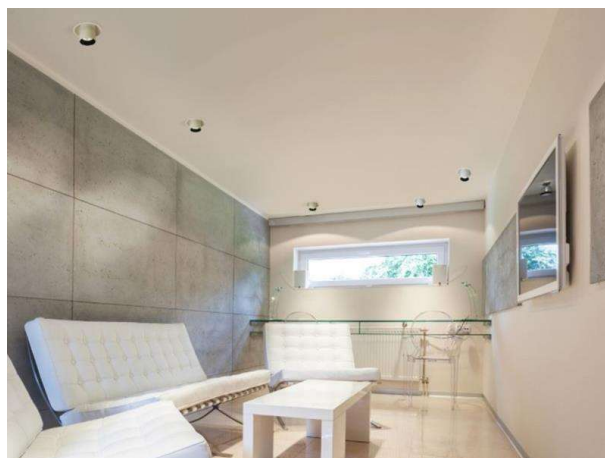


DRAWING

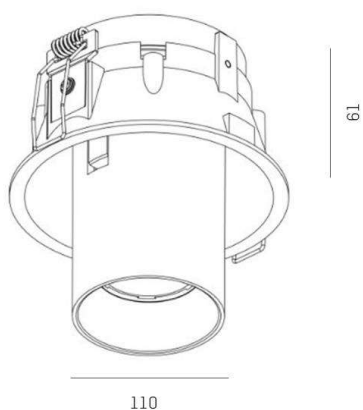

TECHNICAL DETAILS

Bulb type	LED 9W
Luminous flux [lm]	770
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Converter	without converter
Light output	direct
Beam angle [°]	33°
Voltage [V]	17,8 VDC
Material	aluminium
Height [mm]	61
Diameter [mm]	110
Ceiling cutout [mm]	102
Recess depth [mm]	91
IP protection class	IP20
Voltage class	protection cl. III
Net weight [kg]	0,70
Color lamp	white black matt
RAL	9003/9005
EAN-Number	9008905795138
Lifetime [h]	25 000

LIGHT DISTRIBUTION CURVE

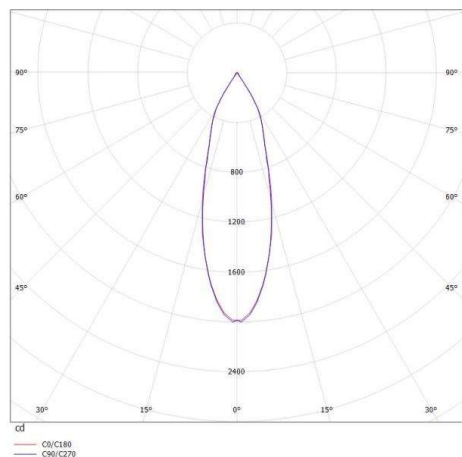

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.