


POLUS

276-0091190003005

POLUS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white matt, similar to RAL 9003, light output direct, with converter, dimmability: not dimmable, IP44




DRAWING

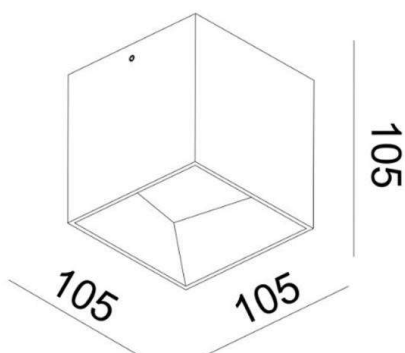

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	606
Colour temp. [K]	3000K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	105
Width [mm]	105
Height [mm]	105
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	0,83
Colour lamp	white matt
RAL	9003
EAN-Number	9008905839405
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

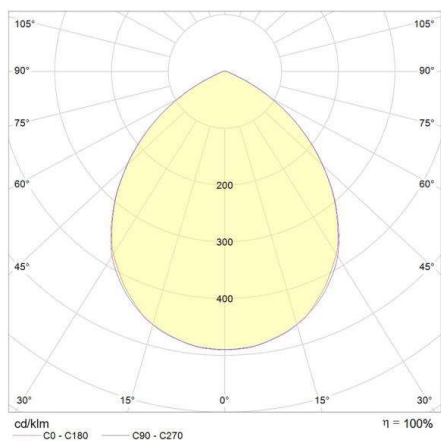

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.