


MAGIS

276-0227050

MAGIS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white matt, similar to RAL 9003, beam 40°, light output direct, swiveling 350°, tilting 90°, with converter, dimmable not dimmable, IP20



DRAWING

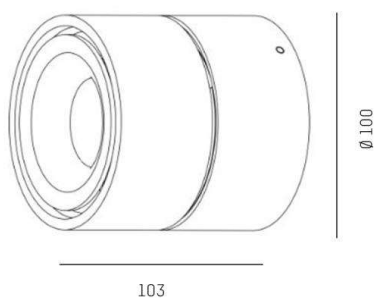


TECHNICAL DETAILS

System perform. [W]	16
Bulb type	LED
Luminous flux [lm]	1160
Colour temp. [K]	2700K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	40°
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Height [mm]	103
Diameter [mm]	100
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,82

LIGHT DISTRIBUTION CURVE

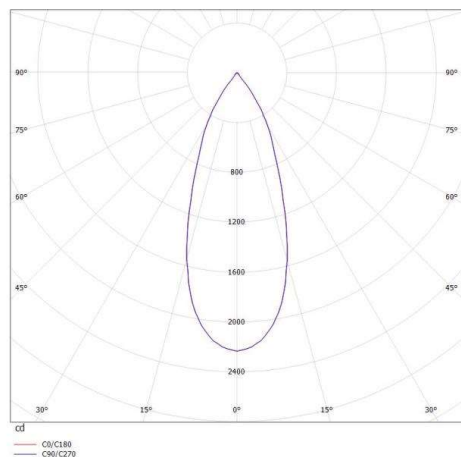

Color lamp	white matt
RAL	9003
EAN-Number	9010506035193
Lifetime [h]	25 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.