


VISIBLE II HV

305-1440b

VISIBLE II RECESSED SPOTLIGHT made of aluminium, black matt, similar to RAL 9005, light output direct, tilting 30°, dimmability: not dimmable, IP20



DRAWING

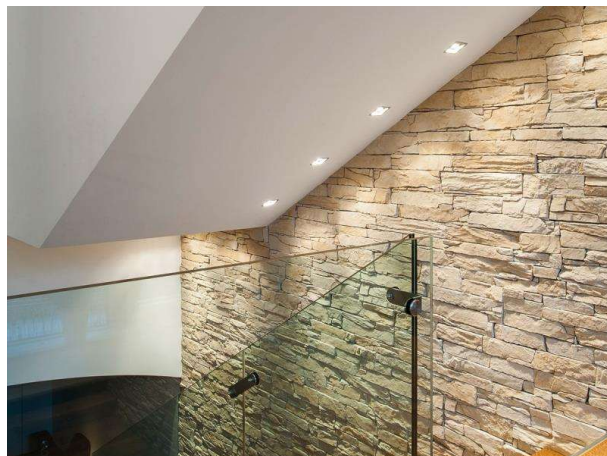

TECHNICAL DETAILS

Bulb type	QPAR 16 50W
No. of bulb holders	1x
Socket	GU10
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	85
Width [mm]	85
Height [mm]	50
Ceiling cutout [mm]	74x72
Recess depth [mm]	135
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,33
Colour lamp	black matt
RAL	9005
EAN-Number	9010506334517

LIGHT DISTRIBUTION CURVE



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.