


## AEON

305-652530b

AEON ROUND SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, beam 45°, light output direct, with converter, max. 250mA, dimmability: not dimmable, IP65




## DRAWING



## TECHNICAL DETAILS

|                        |                  |
|------------------------|------------------|
| System perform. [W]    | 11               |
| Bulb type              | LED              |
| Luminous flux [lm]     | 1070             |
| Current sec. [mA]      | 250              |
| Colour temp. [K]       | 3000K            |
| CRI                    | >80              |
| Converter              | with converter   |
| Dimming                | not dimmable     |
| Light output           | direct           |
| Beam angle [°]         | 45°              |
| Voltage [V]            | 220-240V 50/60Hz |
| Material               | aluminium        |
| Height [mm]            | 105              |
| Diameter [mm]          | 80               |
| IP protection class    | IP65             |
| Voltage class          | protection cl. I |
| Net weight [kg]        | 0,40             |
| Colour lamp            | black            |
| RAL                    | 9005             |
| EAN-Number             | 9010979316119    |
| Lifetime [h]           | L80 B10 50 000   |
| Energy efficiency cl.  | F                |
| No. of luminaires B16A | 42               |

## LIGHT DISTRIBUTION CURVE

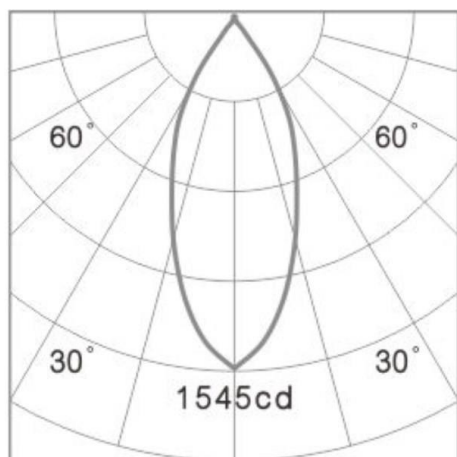

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.