


WINDOW

305-6801p

WINDOW I RECESSED SPOTLIGHT made of aluminium, natural anodised, light output direct, without converter, max. 250mA, dimmability: see converter, IP20




DRAWING

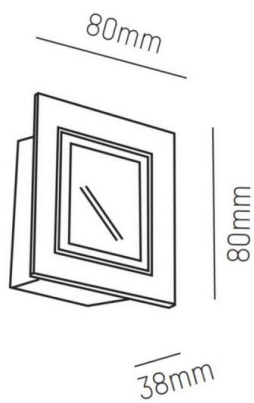

TECHNICAL DETAILS

| | |
|-----------------------|--------------------|
| Bulb type | LED 3W |
| Luminous flux [lm] | 235 |
| Current sec. [mA] | 250 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| Converter | without converter |
| Dimming | see converter |
| Light output | direct |
| Voltage [V] | 15 VDC |
| Material | aluminium |
| Length [mm] | 80 |
| Width [mm] | 80 |
| Height [mm] | 38 |
| Ceiling cutout [mm] | 69x69 |
| Recess depth [mm] | 68 |
| IP protection class | IP20 |
| Voltage class | protection cl. III |
| Net weight [kg] | 0,12 |
| Colour lamp | natural anodised |
| EAN-Number | 9008905807091 |
| Lifetime [h] | L80 B10 20 000 |
| Energy efficiency cl. | E |

LIGHT DISTRIBUTION CURVE

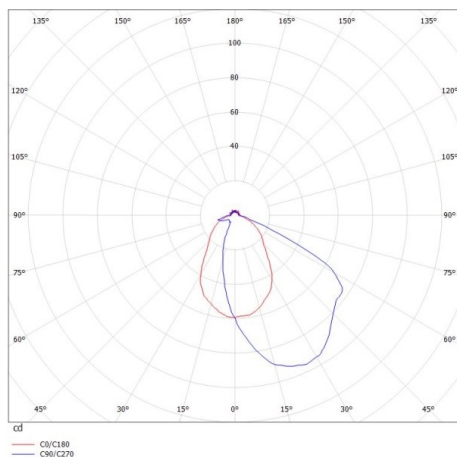

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.