


JIB

341-0000880503004

JIB W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, silver matt, similar to RAL 7042, beam 50°, light output direct, swiveling 320°, tilting 90°, dimmability: not dimmable, IP55




DRAWING

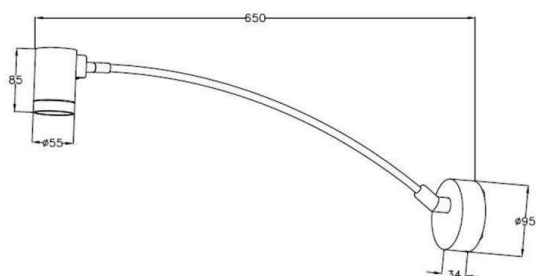

TECHNICAL DETAILS

System perform. [W]	8
Bulb type	AC LED
Luminous flux [lm]	475
Colour temp. [K]	3000K
CRI	>80
Dimming	not dimmable
Light output	direct
Beam angle [°]	50°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	650
Width [mm]	95
Height [mm]	236
IP protection class	IP55
Voltage class	protection cl. I
Net weight [kg]	1,24
Colour lamp	silver matt
RAL	7042
EAN-Number	9010506372021
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	G

LIGHT DISTRIBUTION CURVE

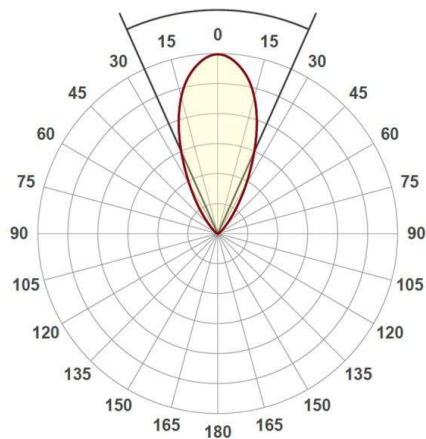

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.