MOON

392-0030680004005

MOON SQUARE R RECESSED CEILING LUMINAIRE made of aluminium, white matt, similar to RAL 9003, light output direct, without converter, max. 250mA, dimmability: see converter, IP44

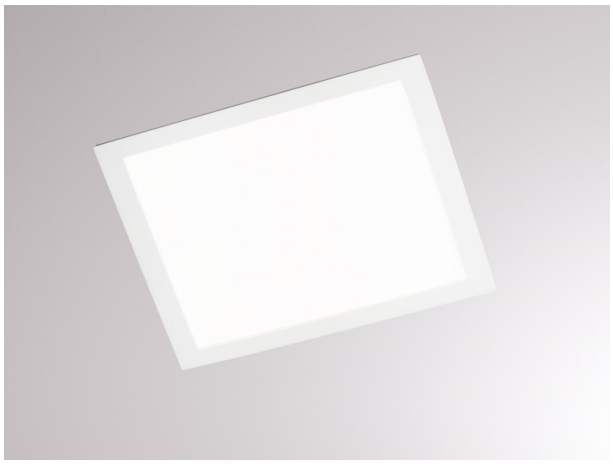

DRAWING

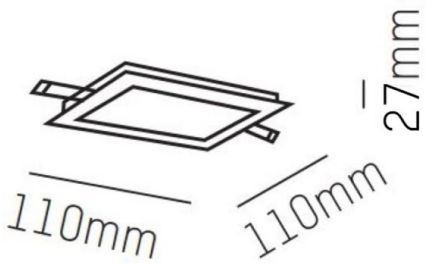

TECHNICAL DETAILS

Bulb type	LED 6W
Luminous flux [lm]	670
Current sec. [mA]	250
Colour temp. [K]	4000K
CRI	>80
Converter	without converter
Dimming	see converter
Light output	direct
Voltage [V]	25 VDC
Material	aluminium
Length [mm]	110
Width [mm]	110
Height [mm]	27
Ceiling cutout [mm]	95x95
Recess depth [mm]	57
IP protection class	IP44
Voltage class	protection cl. III
Net weight [kg]	0,15
Colour lamp	white matt
RAL	9003
EAN-Number	9010506372304
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	C

LIGHT DISTRIBUTION CURVE

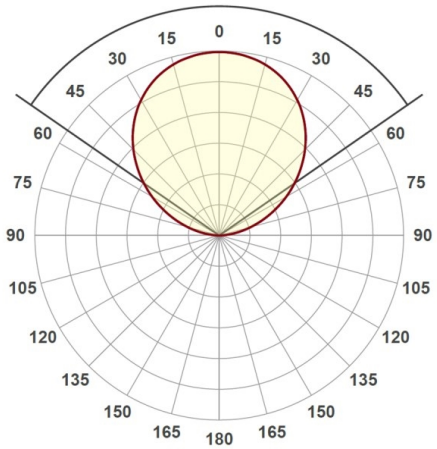

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.