MOLTO LUCE®

BADO SD IP 54

445-02401915d

BADO IP54 SD WALL / CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003,satined PMMA opal diffuser light output direct, with converter, dimmability: DALI, IP54

DRAWING

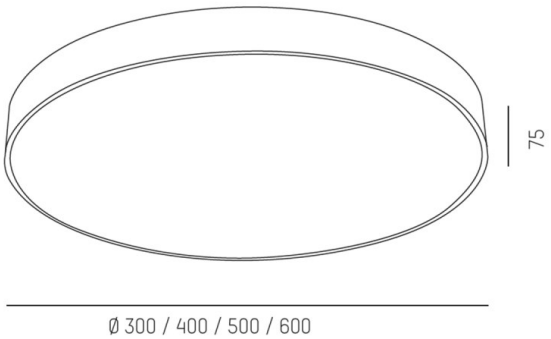

TECHNICAL DETAILS

System perform. [W]	29
Bulb type	LED
Luminous flux [lm]	3450
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	75
Diameter [mm]	400
IP protection class	IP54
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	3,50
Colour lamp	white
RAL	9003
EAN-Number	9010506312843
Lifetime [h]	L85 B10 50 000

LIGHT DISTRIBUTION CURVE

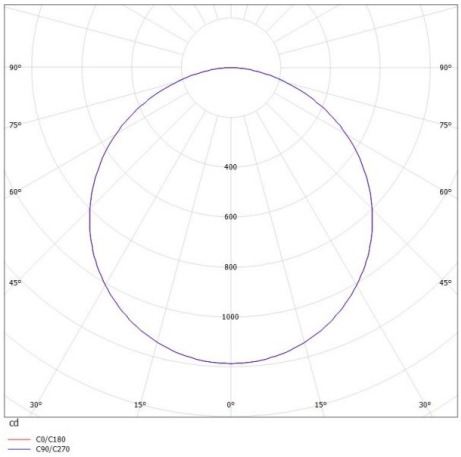

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.