

BADO NOVA 2 PDI**445-546014250**

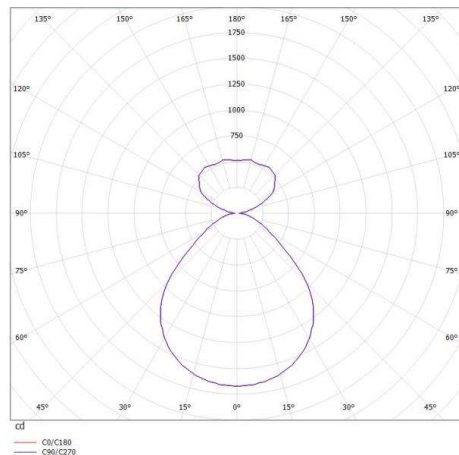
BADO NOVA 2 PDI SUSPENSION made of aluminium, white, similar to RAL 9003, microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, cable transparent, adapter/ceiling base white, pendant length MAX 1500mm, IP40

**DRAWING****TECHNICAL DETAILS**

| | |
|---------------------|----------------------|
| System perform. [W] | 41 |
| Bulb type | LED |
| Luminous flux [lm] | 5850 |
| Colour temp. [K] | 4000K |
| CRI | >80 |
| UGR | <19 |
| Optics | microprismatic cover |
| Converter | with converter |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |

| | |
|---------------------|------------------|
| Height [mm] | 38 |
| Pendant length [mm] | MAX 1500 |
| Diameter [mm] | 600 |
| IP protection class | IP40 |
| Voltage class | protection cl. I |
| Shock resistance | IK02 |
| Net weight [kg] | 6,20 |

| | |
|----------------------------|-------------------|
| Color lamp | white |
| RAL | 9003 |
| Color adapter/ceiling base | white transparent |
| Electric wire | 9010506304589 |
| EAN-Number | L85 B10 50 000 |
| Lifetime [h] | |

LIGHT DISTRIBUTION CURVE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.