# CADAN NOVA SDI

**445-7115019280**

CADAN NOVA SDI WALL / CEILING LUMINAIRE made of aluminium, natural anodised,microprismatic PMMA cover for perfect anti-glare light output direct / indirect, UGR <19, with converter, dimmability: not dimmable, IP20

## DRAWING

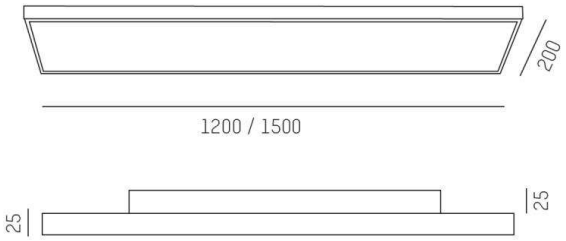


## TECHNICAL DETAILS

| | |
|---|---|
| System perform. [W] | 53 |
| Bulb type | LED |
| Luminous flux [lm] | 5984 |
| Colour temp. [K] | 3000K |
| CRI | >80 |
| UGR | <19 |
| Optics | microprismatic cover |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct / indirect |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| | |
| Length [mm] | 1500 |
| Width [mm] | 200 |
| Height [mm] | 50 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Shock resistance | IK02 |
| Net weight [kg] | 7,70 |
| | |
| Color lamp | natural anodised |
| EAN-Number | 9008905876677 |
| Lifetime [h] | L85 B10 50 000 |
| No. of luminaires B16A | 30 |

## LIGHT DISTRIBUTION CURVE

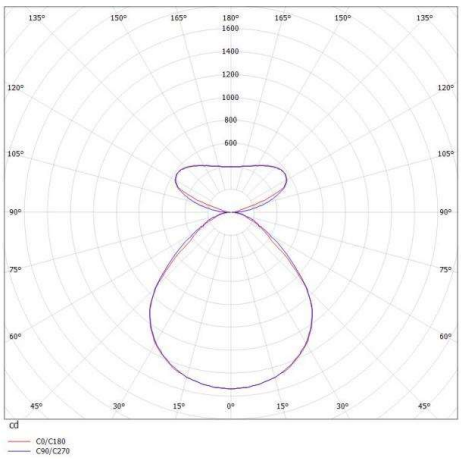


CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.