MOLTO LUCE®

CADAN NOVA SD

445-721501928d

CADAN NOVA SD WALL / CEILING LUMINAIRE made of aluminium, natural anodised,microprismatic PMMA cover for perfect anti-glare light output direct, UGR <19, with converter, dimmability: DALI, IP20

DRAWING

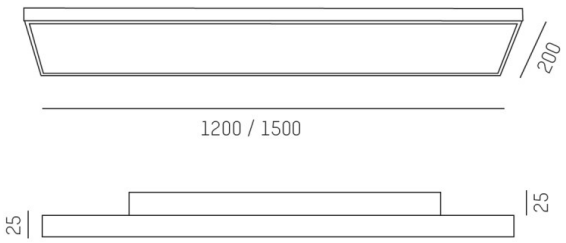

TECHNICAL DETAILS

System perform. [W]	32
Bulb type	LED
Luminous flux [lm]	3403
Colour temp. [K]	3000K
CRI	>80
UGR	<19
Optics	microprismatic cover
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	1500
Width [mm]	200
Height [mm]	50
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	7,60
Colour lamp	natural anodised
EAN-Number	9008905877162
Lifetime [h]	L85 B10 50 000
No. of luminaires B16A	24

LIGHT DISTRIBUTION CURVE

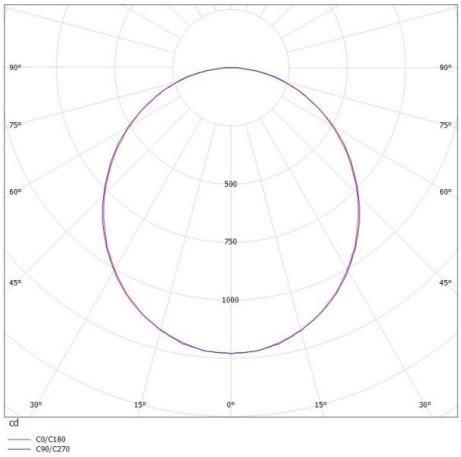

CE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.