


CADAN NOVA SYSTEM PDI

445-796019160

CADAN NOVA SYSTEM PDI CORNER CONNECTOR made of aluminium, black, similar to RAL 9005, satined PMMA opal diffuser light output direct / indirect, with converter, cable transparent, adapter/ceiling base black, pendant length MAX 1500mm, IP20



DRAWING

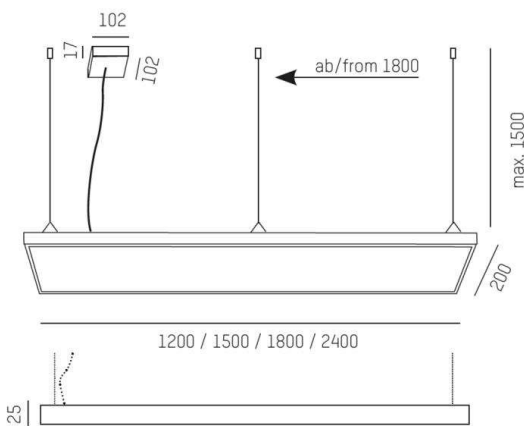


TECHNICAL DETAILS

System perform. [W]	35
Bulb type	LED
Luminous flux [lm]	3749
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	with converter
Light output	direct / indirect
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Length [mm]	600
Width [mm]	200
Height [mm]	25
Pendant length [mm]	MAX 1500
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK02
Net weight [kg]	4,50

LIGHT DISTRIBUTION CURVE

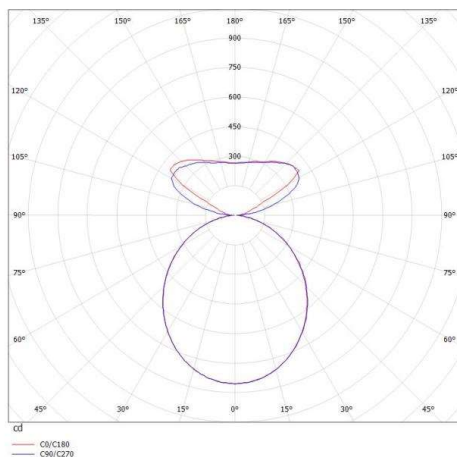

Color lamp	black
RAL	9005
Color adapter/ceiling base	black
base	transparent
Electric wire	9010506306965
EAN-Number	L85 B10 50 000
Lifetime [h]	



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.