

GET R M

468-120111955

GET ROUND REFL M R RECESSED DOWNLIGHT made of aluminium, white matt, similar to RAL 9016, satined PMMA opal diffuser beam 100°, light output direct, without converter, max. 700/900/1050mA, dimmability: not dimmable, IP40




DRAWING




1 - 20mm



205 mm, ET 100 mm



LIGHT DISTRIBUTION CURVE

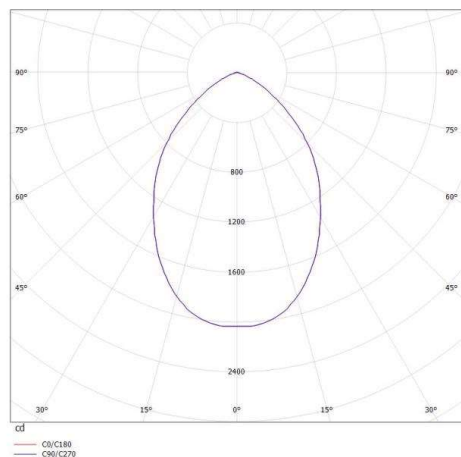

TECHNICAL DETAILS

Bulb type	LED 21W/27W/31W
Luminous flux [lm]	2740/3380/3930
Current sec. [mA]	700/900/1050
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	without converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	100°
Voltage [V]	30 VDC
Material	aluminium
Height [mm]	76
Diameter [mm]	230
Ceiling cutout [mm]	205
Ceiling thickness [mm]	1-20
Recess depth [mm]	100
IP protection class	IP40
Voltage class	protection cl. II
Net weight [kg]	1,43
Colour lamp	white matt
RAL	9016
EAN-Number	9008905647925
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.