

GET R M

468-220111955

GET SQUARE REFL M R RECESSED DOWNLIGHT made of aluminium, white, similar to RAL 9016, satined PMMA opal diffuser beam 100°, light output direct, without converter, max. 700/900/1050mA, dimmability: see converter, IP40




DRAWING




1 - 20mm



205 x 205 mm, ET 100 mm



LIGHT DISTRIBUTION CURVE

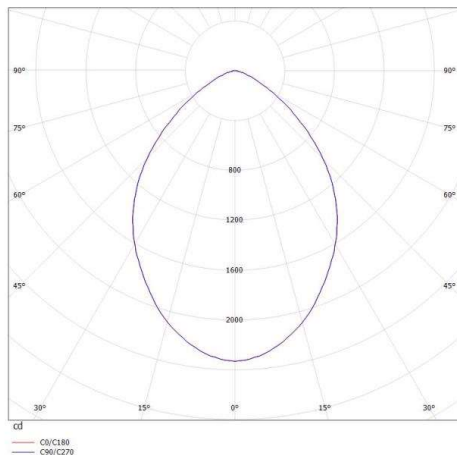

TECHNICAL DETAILS

Bulb type	LED 21W/27W/31W
Luminous flux [lm]	2860/3525/4100
Current sec. [mA]	700/900/1050
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Converter	without converter
Dimming	see converter
Light output	direct
Beam angle [°]	100°
Voltage [V]	30 VDC
Material	aluminium
Length [mm]	230
Width [mm]	230
Height [mm]	76
Ceiling cutout [mm]	205x205
Ceiling thickness [mm]	1-20
Recess depth [mm]	100
IP protection class	IP40
Voltage class	protection cl. III
Net weight [kg]	1,60
Colour lamp	white
RAL	9016
EAN-Number	9008905647932
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.