


CARMİ

472-1227060

CARMİ SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black matt, similar to RAL 9005, light output direct, with converter, max. 300mA, dimmability: not dimmable, IP20




DRAWING

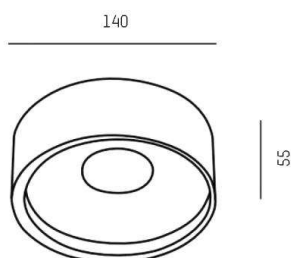

TECHNICAL DETAILS

| | |
|-----------------------|------------------|
| System perform. [W] | 11 |
| Bulb type | LED |
| Luminous flux [lm] | 455 |
| Current sec. [mA] | 300 |
| Colour temp. [K] | 2700K |
| CRI | >90 |
| Converter | with converter |
| Dimming | not dimmable |
| Light output | direct |
| Voltage [V] | 36 VDC |
| Material | aluminium |
| Height [mm] | 55 |
| Diameter [mm] | 140 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 1,03 |
| Colour lamp | black matt |
| RAL | 9005 |
| EAN-Number | 9010506036176 |
| Lifetime [h] | L80 B10 20 000 |
| Energy efficiency cl. | E |

LIGHT DISTRIBUTION CURVE

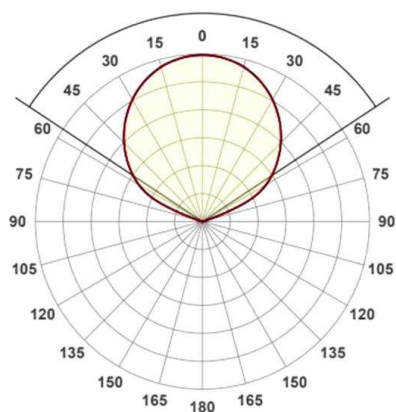

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.