


CARMİ

472-12270630

CARMİ SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black gold, similar to RAL 9005/1036, light output direct, with converter, max. 300mA, dimmability: not dimmable, IP20




DRAWING

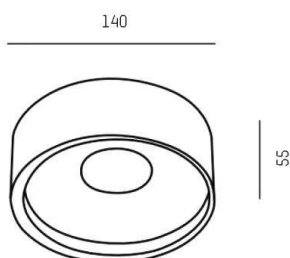

TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	540
Current sec. [mA]	300
Colour temp. [K]	2700K
CRI	>90
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	36 VDC
Material	aluminium
Height [mm]	55
Diameter [mm]	140
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,03
Colour lamp	black gold
RAL	9005/1036
EAN-Number	9010506037937
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

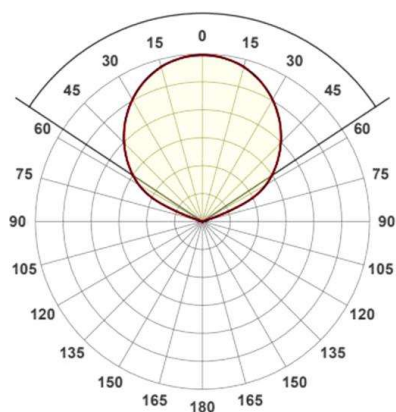

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.