


## TILIS

472-20093500

TILIS SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, light output direct, with converter, dimmability: not dimmable, IP20




## DRAWING

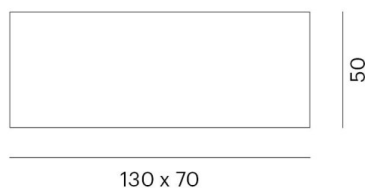

## TECHNICAL DETAILS

|                       |                  |
|-----------------------|------------------|
| System perform. [W]   | 10               |
| Bulb type             | LED              |
| Luminous flux [lm]    | 810              |
| Colour temp. [K]      | 2700K            |
| CRI                   | >90              |
| Converter             | with converter   |
| Dimming               | not dimmable     |
| Light output          | direct           |
| Voltage [V]           | 220-240V 50/60Hz |
| Material              | aluminium        |
| Length [mm]           | 130              |
| Width [mm]            | 70               |
| Height [mm]           | 50               |
| IP protection class   | IP20             |
| Voltage class         | protection cl. I |
| Net weight [kg]       | 0,33             |
| Colour lamp           | white            |
| RAL                   | 9003             |
| EAN-Number            | 9010506275933    |
| Lifetime [h]          | L80 B10 20 000   |
| Energy efficiency cl. | F                |

## LIGHT DISTRIBUTION CURVE

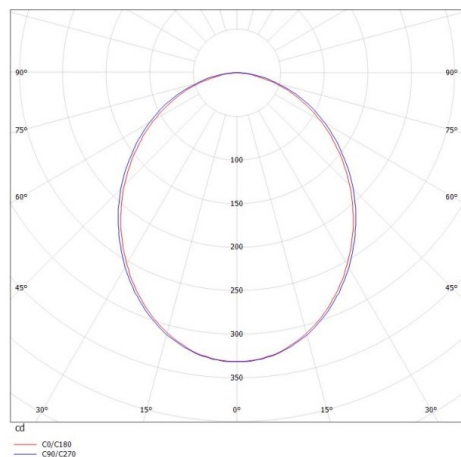

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.