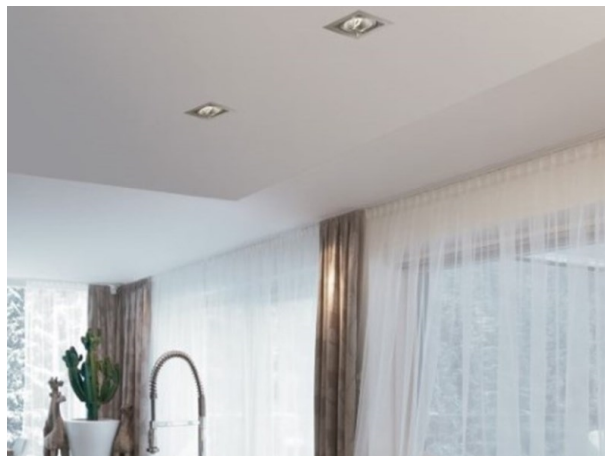
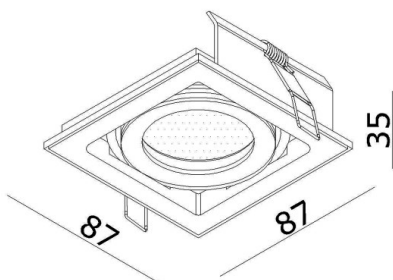


QANA**472-25903405hv**

QANA 1 R RECESSED SPOTLIGHT made of aluminium, white matt, similar to RAL 9003, light output direct, swiveling 350°, tilting 30°, dimmability: not dimmable, IP20

**DRAWING****TECHNICAL DETAILS**

| | |
|---------------------|------------------|
| Bulb type | QPAR 16 50W |
| No. of bulb holders | 1x |
| Socket | GU10 |
| Dimming | not dimmable |
| Light output | direct |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Length [mm] | 87 |
| Width [mm] | 87 |
| Height [mm] | 35 |
| Ceiling cutout [mm] | 76x76 |
| Recess depth [mm] | 65 |
| IP protection class | IP20 |
| Voltage class | protection cl. I |
| Net weight [kg] | 0,27 |
| Colour lamp | white matt |
| RAL | 9003 |
| EAN-Number | 9008905898112 |

LIGHT DISTRIBUTION CURVE

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.