


ARIK

472-260029

ARIK SHORT SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white matt, similar to RAL 9003, acrylic glass cover satined, light output direct, with converter, IP20



DRAWING

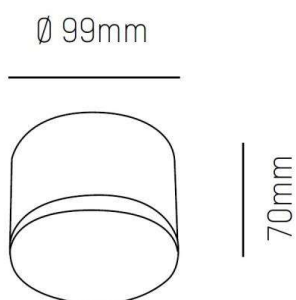


TECHNICAL DETAILS

System perform. [W]	11
Bulb type	LED
Luminous flux [lm]	360
Colour temp. [K]	3000K
CRI	>90
Optics	acrylic glass cover
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Height [mm]	70
Diameter [mm]	99
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,49

Color lamp	white matt
RAL	9003
Glass color	satined
EAN-Number	9008905862359
Lifetime [h]	25 000

LIGHT DISTRIBUTION CURVE

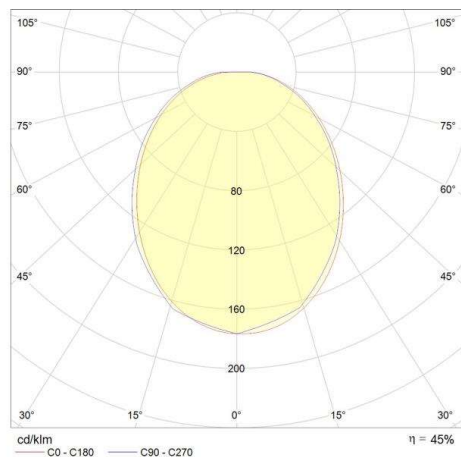

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.