


MUSO

501-1r331915h

MUSO ROUND SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9010, polycarbonate cover light output direct, with converter, with motion detector and daylight control, IP44




DRAWING

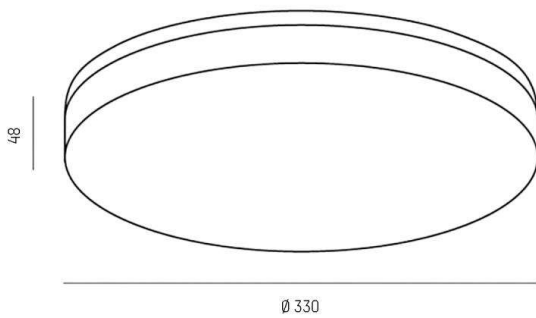

TECHNICAL DETAILS

System perform. [W]	24
Bulb type	LED
Luminous flux [lm]	2270
Colour temp. [K]	3000K
CRI	>80
Optics	polycarbonate cover
Converter	with converter
Motion detector	with motion detector and daylight control
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	synthetic
Height [mm]	53
Diameter [mm]	330
IP protection class	IP44
Voltage class	protection cl. II
Shock resistance	IK08
Net weight [kg]	1,26
Color lamp	white
RAL	9010
EAN-Number	9010506427639
Lifetime [h]	25 000 L80 B10
Energy efficiency cl.	D
No. of luminaires B16A	50

LIGHT DISTRIBUTION CURVE

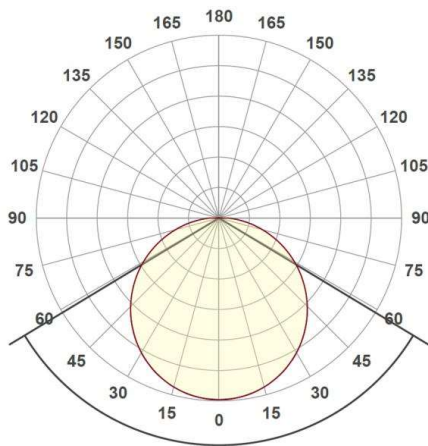

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.