



MUSO

501-q4019150

MUSO SQUARE SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9010, light output direct, with converter, dimmability: not dimmable, IP54

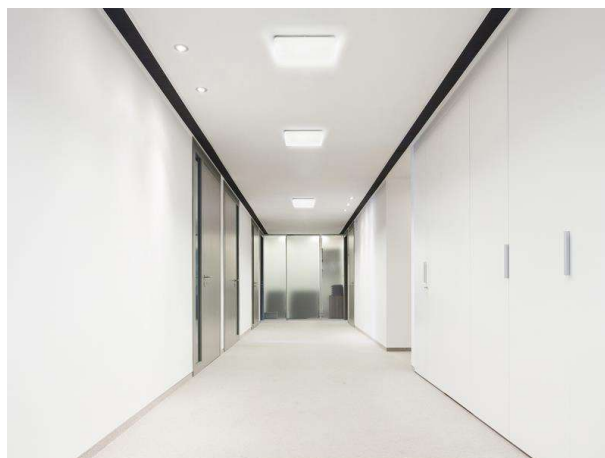

DRAWING

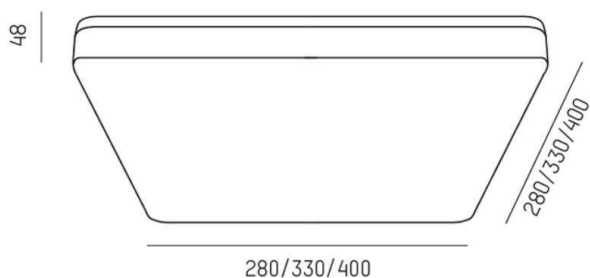

LIGHT DISTRIBUTION CURVE

TECHNICAL DETAILS

System perform. [W]	36
Bulb type	LED
Luminous flux [lm]	3200
Colour temp. [K]	3000K
CRI	>80
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	synthetic
Length [mm]	400
Width [mm]	400
Height [mm]	48
IP protection class	IP54
Voltage class	protection cl. II
Shock resistance	IK08
Net weight [kg]	2,20
Colour lamp	white
RAL	9010
EAN-Number	9008905920790
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	D
No. of luminaires B16A	30



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.