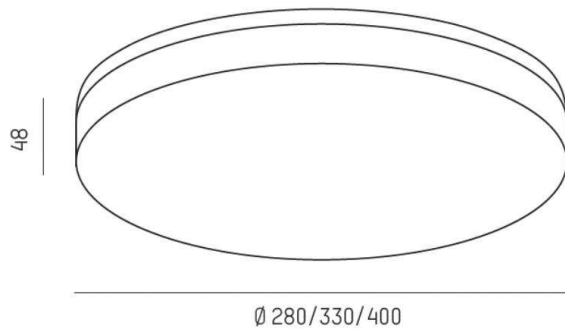


**MUSO****501-r281915e**


MUSO ROUND SD SURFACE MOUNTED CEILING LUMINAIRE made of synthetic, white, similar to RAL 9010, light output direct, with converter, dimmability: not dimmable, IP54 emergency light 3 hours

**DRAWING****TECHNICAL DETAILS**

System perform. [W]	18
Bulb type	LED
Luminous flux [lm]	1750
Colour temp. [K]	3000K
CRI	>80
Converter	with converter
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	synthetic
Height [mm]	48
Diameter [mm]	280
IP protection class	IP54
Voltage class	protection cl. II
Shock resistance	IK08
Net weight [kg]	1,30
Colour lamp	white
RAL	9010
EAN-Number	9010506028072
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	D
No. of luminaires B16A	50

**LIGHT DISTRIBUTION CURVE**

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.

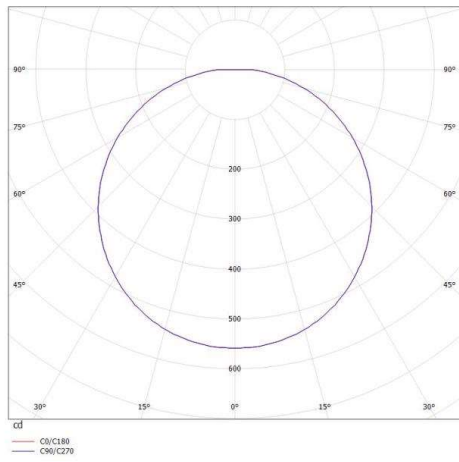

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.