


**MICA IP44 LED**

**520-0191**

MICA IP44 SD WALL / CEILING LUMINAIRE made of metal, chrome, satined PMMA opal diffuser satined, light output direct, with converter, dimmable not dimmable, IP44



**DRAWING**

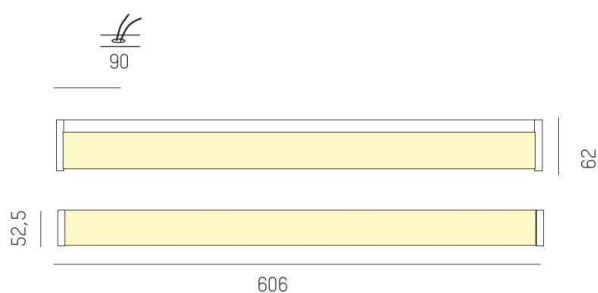


**TECHNICAL DETAILS**

|                     |                    |
|---------------------|--------------------|
| System perform. [W] | 15                 |
| Bulb type           | LED                |
| Luminous flux [lm]  | 1090               |
| Colour temp. [K]    | 3000K              |
| CRI                 | >80                |
| Optics              | PMMA opal diffuser |
| Designer            | INHOUSE            |
| Converter           | with converter     |
| Dimming             | not dimmable       |
| Light output        | direct             |
| Voltage [V]         | 220-240V 50/60HZ   |
| Material            | metal              |
| Length [mm]         | 606                |
| Width [mm]          | 52,5               |
| Height [mm]         | 62                 |
| Troat [mm]          | 52,5               |
| IP protection class | IP44               |
| Voltage class       | protection cl. I   |
| Net weight [kg]     | 2,77               |

|                       |                |
|-----------------------|----------------|
| Color lamp            | chrome         |
| Glass color           | satined        |
| EAN-Number            | 9008905223273  |
| Lifetime [h]          | L80 B10 50 000 |
| Energy efficiency cl. | D              |

**LIGHT DISTRIBUTION CURVE**

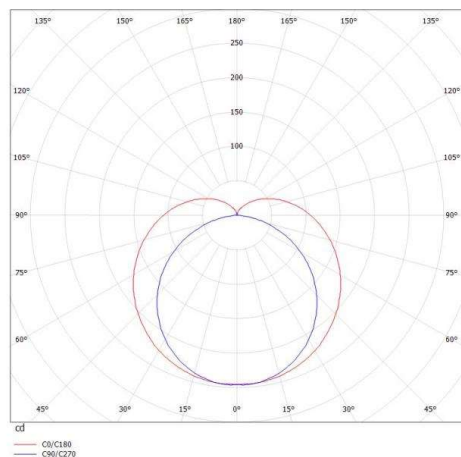

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.