


**MICA IP44 LED**

**520-0291**

MICA IP44 SD WALL / CEILING LUMINAIRE made of metal, chrome, satined PMMA opal diffuser satined, light output direct, with converter, max. 350mA, dimmable not dimmable, IP44



**DRAWING**

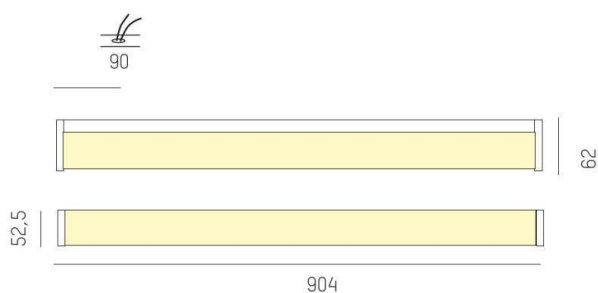


**TECHNICAL DETAILS**

System perform. [W]	21
Bulb type	LED
Luminous flux [lm]	1640
Current sec. [mA]	350
Colour temp. [K]	3000K
CRI	>80
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	nicht dimmbar
Light output	direct
Voltage [V]	220-240V 50/60HZ
Material	metal

Length [mm]	904
Width [mm]	52,5
Height [mm]	62
Troat [mm]	52,5
IP protection class	IP44
Voltage class	protection cl. I
Net weight [kg]	1,64

**LIGHT DISTRIBUTION CURVE**

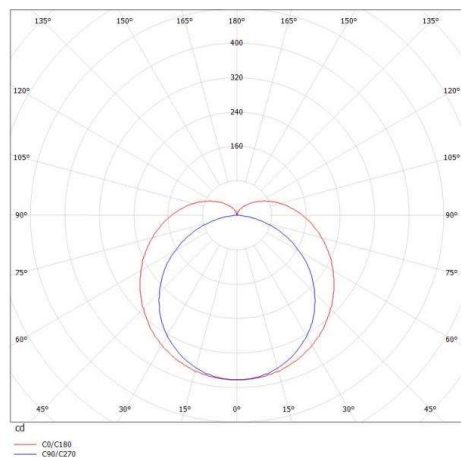

Color lamp	chrome
Glass color	satined
EAN-Number	9008905223396
Lifetime [h]	L80 B10 50 000



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.